
NOTES:


- SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 arcsec


FOR INFORMATION ONLY: PARTS TO THIS DRAWING



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 5. ROHS COMPLIANT



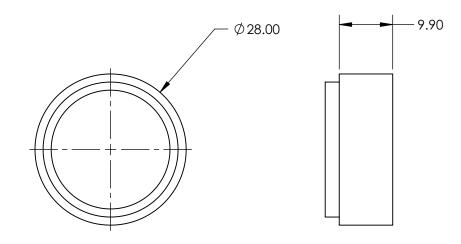



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
CLEAR APERTURE	22	22
COATING APERTURE	UNCOATED	UNCOATED
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION	$\phi \lhd$	TITLE
ALL DIMS IN	mm	DWG NO

e	Edmund Optic	;S®
TITLE	M25.5 x 0.5, OD 0.3, 400 - 700nm ABSOI ND FILTER	RPTIVE
DWG NO	66702	SHEET 1 OF 1

1 OF 1