NOTES:


1. SUBSTRATE: SILICON (SI)

2. SURFACE S2 TO BE PARALLEL TO S1 WITHIN <3 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE) S1 & S2: RAVG <3.0% @ 3 - 5µm

## 4. FINE GRIND SURFACE

5. Rohs Compliant

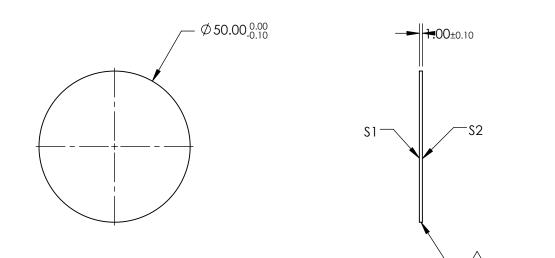

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

~

/4\

Shape	S1 PLANO	S2 PLANO				Edmund Optics®	)
CLEAR APERTURE	90%	90%				50mm DIA. x 1.0mm THICKNESS 3-5µm COATI	FD
SURFACE QUALITY	60-40	60-40	THIRD ANGLE		TITLE	SILICON WINDOW	
SURFACE FLATNESS	1λ	1λ		1			
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	68529 SHE 1 O	