


NOTES:

- 1. SUBSTRATE:
N-BK7
- 2. COATING (APPLY ACROSS COATING APERTURE)
S1: ALUMINUM WITH PROTECTIVE OVERCOAT W/ BLACK OVERPAINT
R(AVG) > 85% FROM 400-700nm @ 45° AOI
R(AVG) > 90% FROM 400-2,000nm @ 45° AOI

S2: ¼ WAVE MgF2 @ 550nm
R(AVG) < 1.75% FROM 400-700nm (N-BK7)


3. FINE GRIND SURFACE

- 4. RoHS COMPLIANT
- 5. TYPICAL ENERGY DENSITY: 0.3 J/cm² @ 10ns @ 532nm & 1064nm

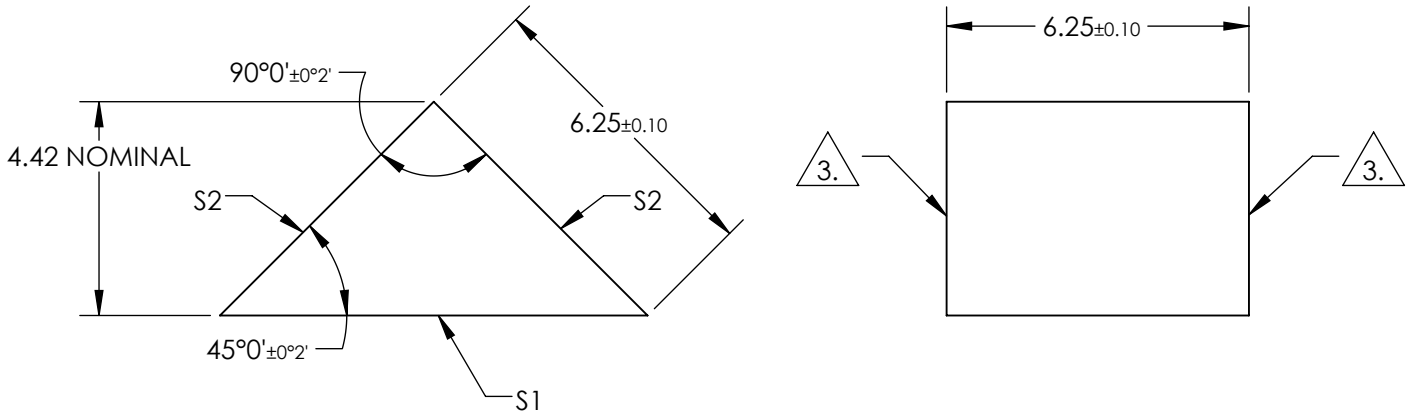

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	<div><div>THIRD ANGLE PROJECTION</div><div></div></div> <div><div>TITLE</div><div>6.25mm, Aluminum & MgF2 Coated, N-BK7 Right Angle Prism</div></div>			
SHAPE	PLANO	PLANO				
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	7.92 x 5.63	5.63 x 5.63				
COATING APERTURE	7.92 x 5.63	5.63 x 5.63				
SURFACE FLATNESS	λ/4	λ/4				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED				
			ALL DIMS IN	mm	DWG NO	45387
						SHEET 1 OF 1

 Edmund Optics®