NOTES:


1. SUBSTRATE MATERIAL: N-SF11


2. ROHS COMPLIANT

3. COATING (APPLY ACROSS CLEAR APERTURE)

S1: R(avg) ≤1.75% @ 400 - 700nm S2: R(avg) ≤1.75% @ 400 - 700nm S3: R(avg) ≤1.75% @ 400 - 700nm

## 4. FINE GROUND SURFACE

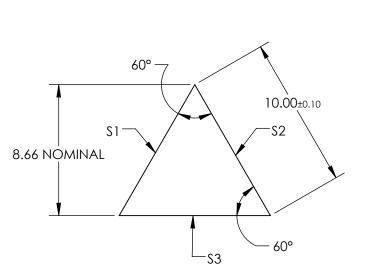

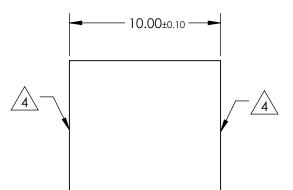

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

(R)

REV. A	\$1, \$2, \$3	]			Edmund Optic	CS®
ANGLE TOL. (arcmin)	±2		1		10mm N-SF11 MgF2 COATED EQUILAT	FRAI
SURFACE QUALITY	40-20			TITLE	PRISM	
SURFACE FLATNESS	λ/4		1			QUEET
BEVEL	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	47280	SHEET 1 OF 1

FOR INFORMATION ONLY:

PARTS TO THIS DRAWING

DO NOT MANUFACTURE