


NOTES:

- 1. SUBSTRATE:
N-BK7
- 2. COATING (APPLY ACROSS COATING APERTURE)
S1: ALUMINUM WITH PROTECTED OVERCOAT
R(AVG)>85% FROM 400-700nm, @ 45° AOI

S2: NONE

3. FINE GRIND SURFACE

- 4. RoHS COMPLIANT

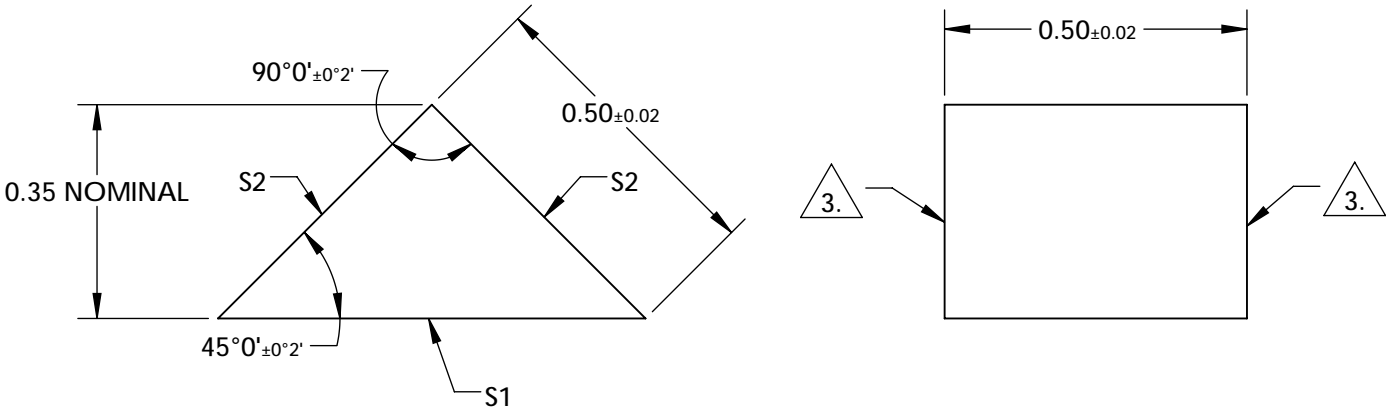

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| REV. A | S1 | S2 | | | | |
|------------------|----------------------|----------------------|--|--|--|--|
| SHAPE | PLANO | PLANO | | | | |
| SURFACE QUALITY | 20-10 | 20-10 | | | | |
| CLEAR APERTURE | 0.63 x 0.45 | 0.45 x 0.45 | | | | |
| COATING APERTURE | 0.63 x 0.45 | 0.45 x 0.45 | | | | |
| SURFACE FLATNESS | λ/4 | λ/4 | | | | |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | | | | |

| | | | | | |
|------------------------|----|--------|--|--------------|--|
| THIRD ANGLE PROJECTION | | TITLE | 0.5mm, Aluminum Coated N-BK7 Right Angle Prism | | |
| ALL DIMS IN | mm | DWG NO | 66771 | SHEET 1 OF 1 | |

Edmund Optics®