


NOTES:

1. SUBSTRATE:  
N-BK7
2. COATING (APPLY ACROSS COATING APERTURE)  
S1: ALUMINUM WITH PROTECTED OVERCOAT  
R(AVG)>85% FROM 400-700nm, @ 45° AOI  
  
S2: NONE

 FINE GRIND SURFACE

4. RoHS COMPLIANT

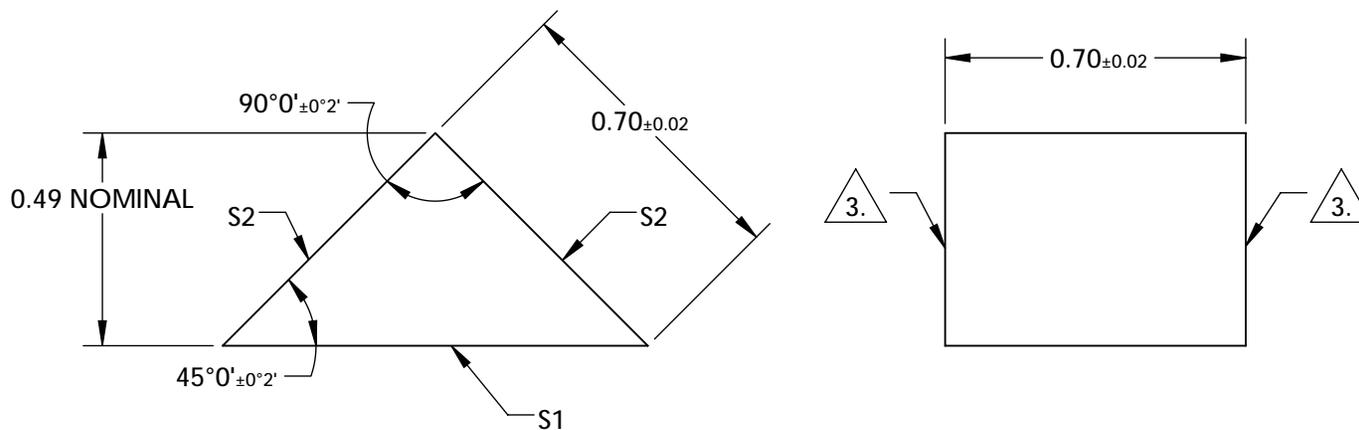


**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	0.9 x 0.63	0.63 x 0.63
COATING APERTURE	0.9 x 0.63	0.63 x 0.63
SURFACE FLATNESS	$\lambda/4$	$\lambda/4$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE  
PROJECTION



ALL DIMS IN

mm

 **Edmund Optics®**

TITLE

0.7mm, Aluminum Coated, N-BK7 Right Angle Prism

DWG NO

66773

SHEET  
1 OF 1