

NOTES:


1. SUBSTRATE MATERIAL:  
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2:  
LASER V-COAT

R(abs) <0.25% @ 532nm  
R(avg) <1.5% @ 495 - 570nm





3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY  
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

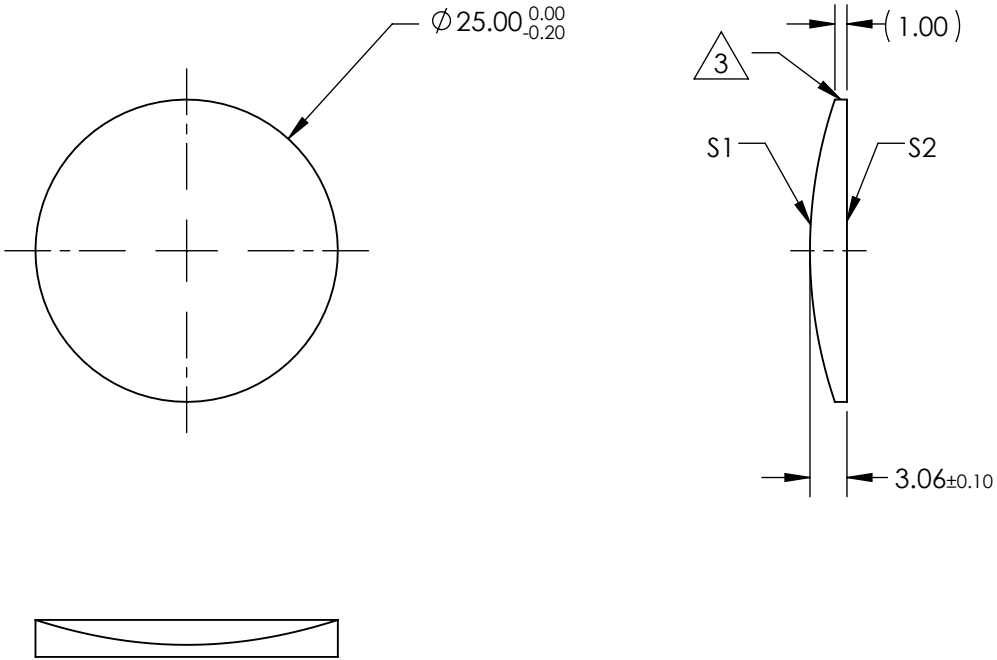

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®				
SHAPE	CONVEX	PLANO					EFL
RADIUS	38.89	∞	BFL	(72.89)	 TITLE 25.0mm DIA X 75.0mm FL 532nm V-COAT, CYLINDER LENS		
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	Ø 24.00	Ø 24.00					
COATING APERTURE	Ø 24.00	Ø 24.00			TITLE	25.0mm DIA X 75.0mm FL 532nm V-COAT, CYLINDER LENS	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					
			ALL DIMS IN	mm	DWG NO	33229	SHEET 1 OF 1