## NOTES:


- 1. SUBSTRATE MATERIAL: N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: MgF2

R(avg) ≤1.75% @ 400 - 700nm

3. FINE GROUND SURFACE

- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. ROHS COMPLIANT

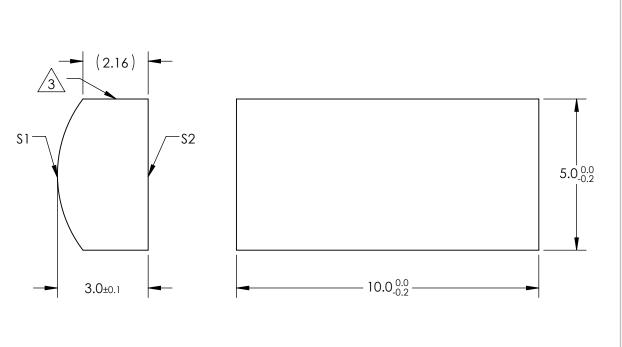



## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	\$2					
SHAPE	CONVEX	PLANO	EFL				ation
RADIUS	4.13	∞	BFL	5.72	Edmund Optics <sup>®</sup>		
SURFACE QUALITY	60-40	60-40			TITLE	5mm H X 10mm L X 8mm FL MgF2 COATED, CYLINDER LENS	
CLEAR APERTURE	4.00 x 9.00	4.00 x 9.00					
COATING APERTURE	4.00 x 9.00	4.00 x 9.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	47763	SHEET 1 OF 1