NOTES:

1. SUBSTRATE MATERIAL: N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: MgF2


R(avg) ≤1.75% @ 400 - 700nm



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. Rohs Compliant



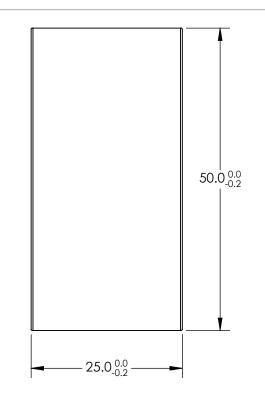

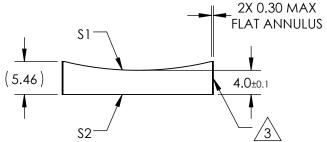

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2				
SHAPE	CONVEX	PLANO	EFL	-100		Edmund Ontice
RADIUS	-51.68	∞	BFL	-102.64		Edmund Optics®
SURFACE QUALITY	60-40	60-40				25mm H X 50mm L X -100mm FL MgF2
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00	THIRD ANGLE PROJECTION		TITLE	COATED, CYLINDER LENS
COATING APERTURE	24.00 X 49.00	24.00 X 49.00				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	68083 SHEE 1 OF