
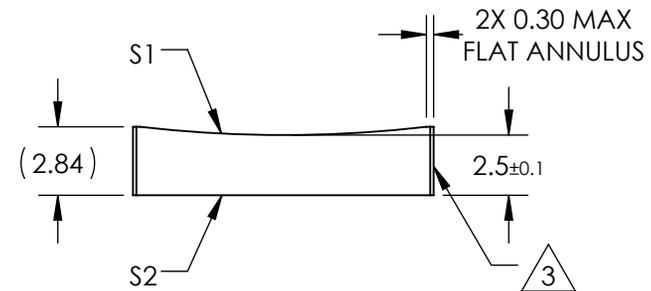


NOTES:

1. SUBSTRATE MATERIAL:  
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)  
  
S1 & S2: NIR I  
  
R(avg)  $\leq 0.5\%$  @ 600 - 1050nm


3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

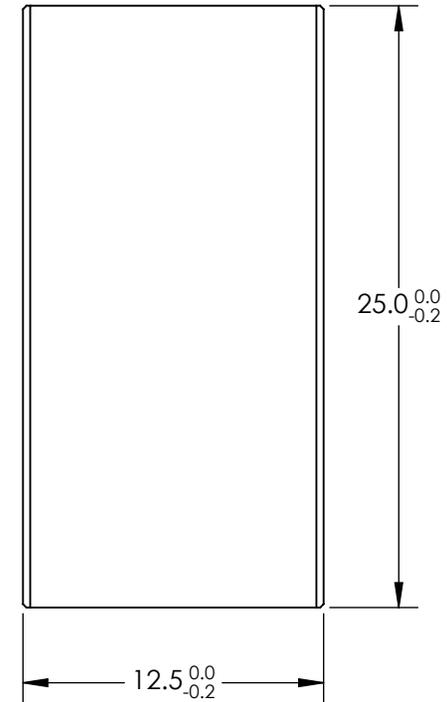

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	-100	 <b>Edmund Optics®</b>		
RADIUS	51.68	$\infty$	BFL	-101.65			
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION 		TITLE	12.5mm H X 25mm L X -100mm FL NIR I COATED, CYLINDER LENS	
CLEAR APERTURE	11.50 X 24.00	11.50 X 24.00			ALL DIMS IN	mm	DWG NO
COATING APERTURE	11.50 X 24.00	11.50 X 24.00					SHEET 1 OF 1
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					