NOTES:

1. SUBSTRATE MATERIAL: **ALUMINUM** 


## FOR INFORMATION ONLY: PARTS TO THIS DRAWING


- 2. FINISH (EXCEPT SURFACE \$1 & \$2): BLACK ANODIZED


3. COATING (APPLY ACROSS CLEAR APERTURE)
S1: PROTECTED GOLD
R(AVG) >94% @ 0.7-0.8µm
R(AVG) >97% @ 0.8-2.0µm
R(AVG) >98% @ 2-12µm

SURFACE ROUGHNESS: <50 Å RMS

- 4. FOCAL LENGTH TOLERANCE: ±1%
- 5. ROHS COMPLIANT

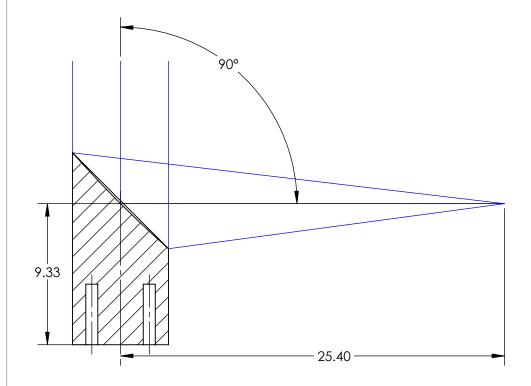





SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	\$1
SHAPE	PARABOLIC
SURFACE FIGURE AT 632.8nm (RMS)	λ/8
CLEAR APERTURE	90%
BEVEL	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION	$\phi$	TITLE
ALL DIMS IN	mm	DWG

<b>Edmund Optics</b> ®
Ø6.35 X 25.4mm EFL, PROTECTED GOLD 50Å
OFF-AXIS PARABOLIC MIRROR

DIMS IN	mm	DWG NO	37296	SHEET 1 OF 1