

NOTES:

1. SUBSTRATE: ALUMINUM 6061-T6

2. COATING
UV ENHANCED ALUMINUM

R(AVG) > 89% FROM 250-450nm
R(AVG) > 85% FROM 2,000-10,000nm





3. SURFACE ROUGHNESS: <50 Å RMS

4. SYSTEM SHALL BE ALIGNED TO DATUM [A] WITH
REFLECTED WAVEFRONT ERROR OF $\leq 1/10$
WAVE AT 632.8 nm FOR $\varnothing 1$ mm INPUT BEAM.

5. INTEGRATED ALIGNMENT FLATS

6. OPTICAL CENTER LINE

7. RoHS COMPLIANT

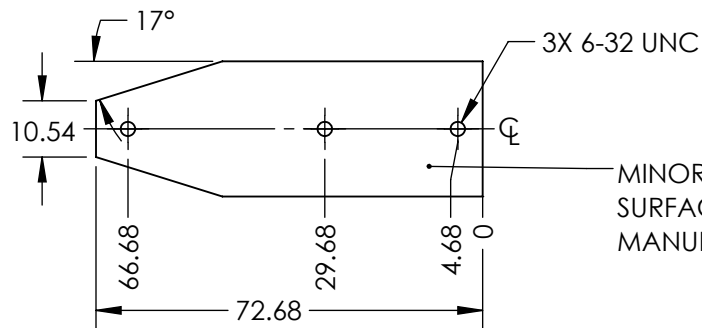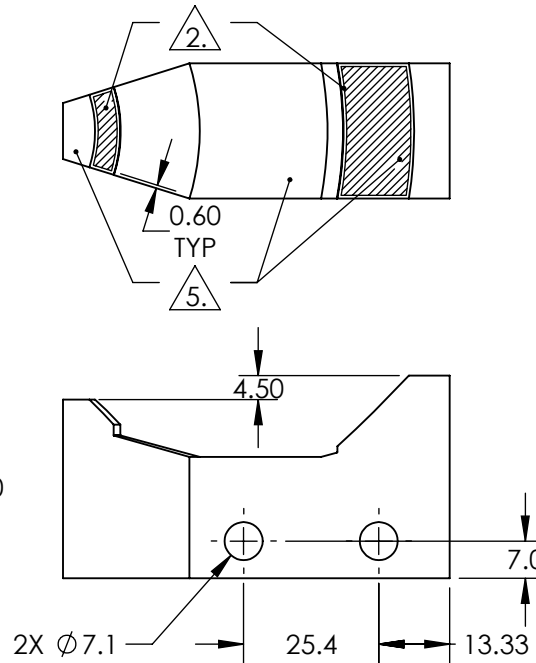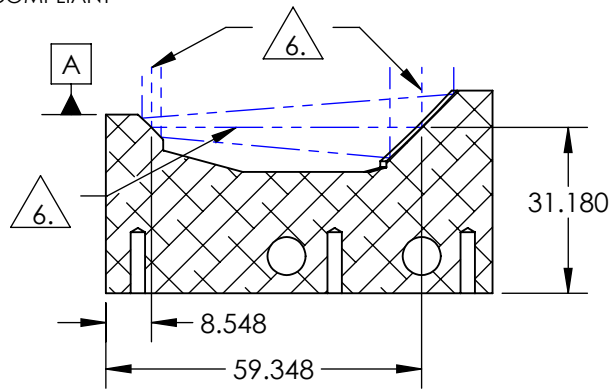

MINOR SCRATCHES ON THE NON-OPTICAL
SURFACE MIGHT BE PRESENT DUE TO THE
MANUFACTURING PROCESS.

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR
REFERENCE ONLY

Edmund Optics®

REV. A	S1
SHAPE	MONOLITHIC
BEVEL	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION		TITLE	3X, UV Enhanced Aluminum Canopus™ Reflective Beam Expander	
		DWG NO	37186	SHEET 1 OF 1