
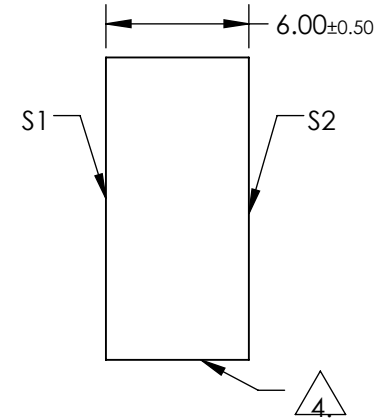
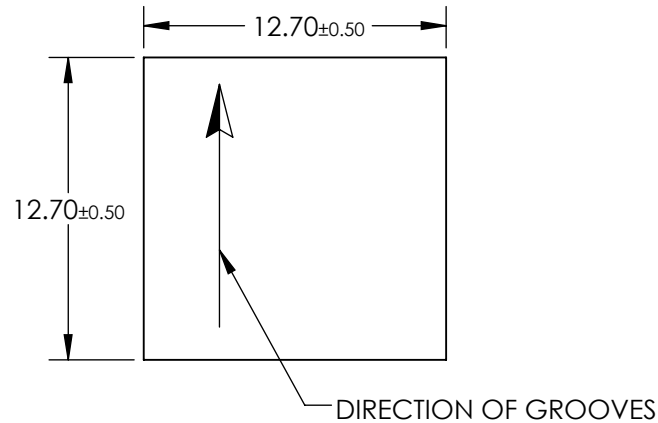


NOTES:

1. SUBSTRATE MATERIAL:  
FLOAT GLASS
2. COATING (APPLY ACROSS CLEAR APERTURE):  
S1: BARE ALUMINUM  
S2: NONE
3. WAVELENGTH RANGE: 250-400nm  
ABSOLUTE DIFFRACTION EFFICIENCY: 45-65%  
GROOVE DENSITY: 2400 grooves/mm

4. EDGES GROUND

5. RoHS COMPLIANT



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

**EO**® Edmund Optics®

	S1	S2	THIRD ANGLE PROJECTION		TITLE	GRATING HOLO 2400GR UV 12.7 X 12.7	
SHAPE	PLANO	PLANO	ALL DIMS IN	mm	DWG NO	43776	SHEET 1 OF 1
CLEAR APERTURE	11.43 x 11.43	11.43 x 11.43					