




NOTES:

1. SUBSTRATE MATERIAL:  
FLOAT GLASS
2. COATING (APPLY ACROSS CLEAR APERTURE):  
S1: BARE ALUMINUM  
S2: NONE
3. WAVELENGTH RANGE: 250-400nm  
ABSOLUTE DIFFRACTION EFFICIENCY: 45-65%  
GROOVE DENSITY: 1800 grooves/mm



4. EDGES GROUND

5. RoHS COMPLIANT

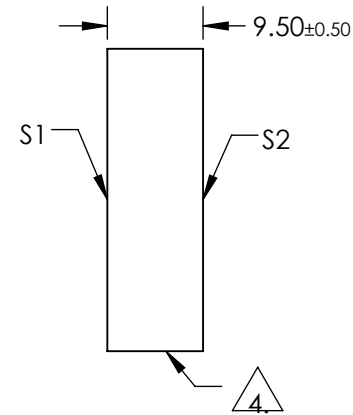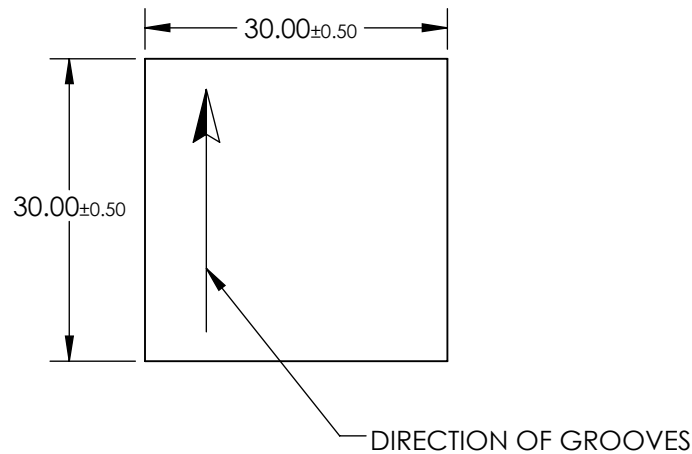

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

**EO**® Edmund Optics®

	S1	S2	THIRD ANGLE PROJECTION	TITLE	GRATING HOLO 1800GR UV 30 X 30	
SHAPE	PLANO	PLANO		ALL DIMS IN	mm	DWG NO
CLEAR APERTURE	27.0 x 27.0	27.0 x 27.0				SHEET 1 OF 1