




NOTES:

1. SUBSTRATE MATERIAL:  
FLOAT GLASS
2. COATING (APPLY ACROSS CLEAR APERTURE):  
S1: BARE ALUMINUM  
S2: NONE
3. WAVELENGTH RANGE: 250-400nm  
ABSOLUTE DIFFRACTION EFFICIENCY: 45-65%  
GROOVE DENSITY: 1800 grooves/mm



4. EDGES GROUND


5. RoHS COMPLIANT

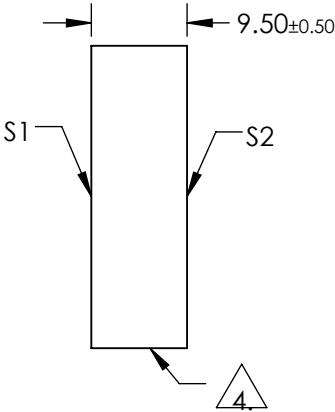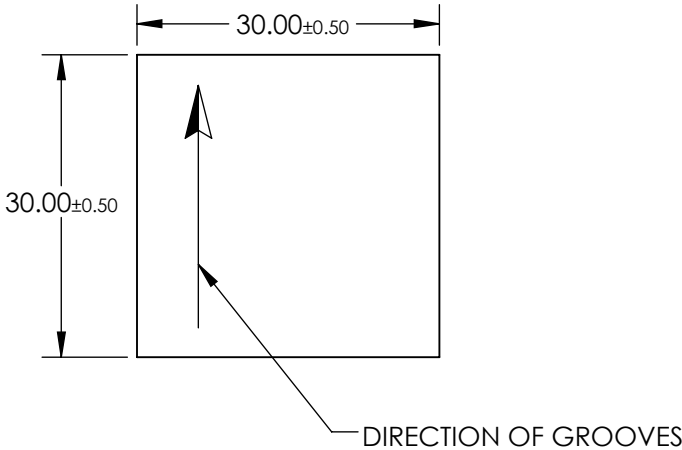

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

			THIRD ANGLE PROJECTION 		TITLE	GRATING HOLO 1800GR UV 30 X 30	
SHAPE	S1 PLANO	S2 PLANO	ALL DIMS IN	mm	DWG NO	48466	SHEET 1 OF 1
CLEAR APERTURE	27.0 x 27.0	N/A					