NOTES:


SUBSTRATE:

Alumoscilate Glass Embedded with Silver Ions

2. COATING (APPLY ACROSS COATING APERTURE)

S1 & S2: Uncoated

- 3. EFL: 0.46 4. f/#:0.92
- 5. NUMERICAL APERTURE: 0.53
 6. DESIGN WAVELENGTH: 1550nm
 7. WORKING DISTANCE: 0mm
- 8. ROHS: COMPLIANT

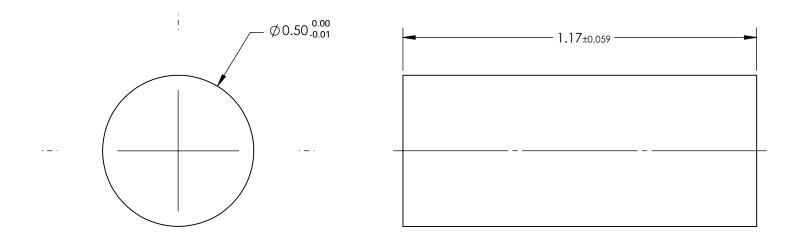

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

Companie Edmund	d Optics®
------------------------	-----------

	\$1	\$2	THIRD ANGLE PROJECTION			0.5mm Dia, 1550nm DWL, 0.0mm WD, Uncoated, GRIN Lens	
SHAPE	PLANO	PLANO			- TITLE		
SURFACE QUALITY	40-20	40-20		1		0.10001001, 0.1111 2011	CLIEFT
CLEAR APERTURE	Ø0.45	Ø0.45	ALL DIMS IN	mm	DWG NO	64527	SHEET 1 OF 1