NOTES:

1. CRYSTAL TYPE: LBO

2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN <20 ARCSEC

3. COATING (APPLY ACROSS COATING APERTURE)


DAMAGE THRESHOLD, PULSED: 10 J/cm² @ 1064nm, 10ns, 10Hz

\$1: 532 & 1064nm AR COATING

S2: 532 & 1064nm AR COATING

4. ORIENTATION (Θ/φ)°: 90/0

5. RoHS: COMPLIANT

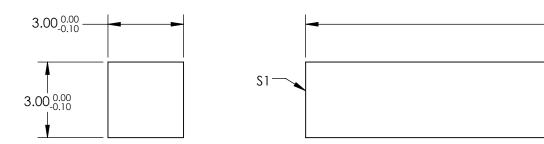



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

 $15.00^{+0.00}_{-0.10}$

	\$1	\$2
SHAPE	PLANO	PLANO
SURFACE FLATNESS	λ/10	λ/10
SURFACE QUALITY	20-10	20-10
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION	$\phi \Leftrightarrow$	TIT
ALL DIMS IN	mm	D۱

Edmund Optics ®
3 x 3 x 15mm, 1064nm NCPM SHG, LBO NONLINEAR CRYSTAL

DIMS IN mm DWG NO 11172	SHEE 1 OF
-------------------------	--------------