


NOTES:

- 1. SUBSTRATE:
FUSED SILICA
- 2. COATING (APPLY ACROSS COATING APERTURE):



LASER NIR (1030-1550nm)
R(AVG) ≤0.7% @ 1030 - 1550nm @ 0° AOI

DAMAGE THRESHOLD,
PULSED: 2 J/cm² @ 1064nm, 20ns, 20Hz
- 3. TRANSMITTED WAVEFRONT DISTORTION P-V:
λ/10 for 4.0mm input beam (nominal, λ = DWL)
- 4. ROHS COMPLIANT

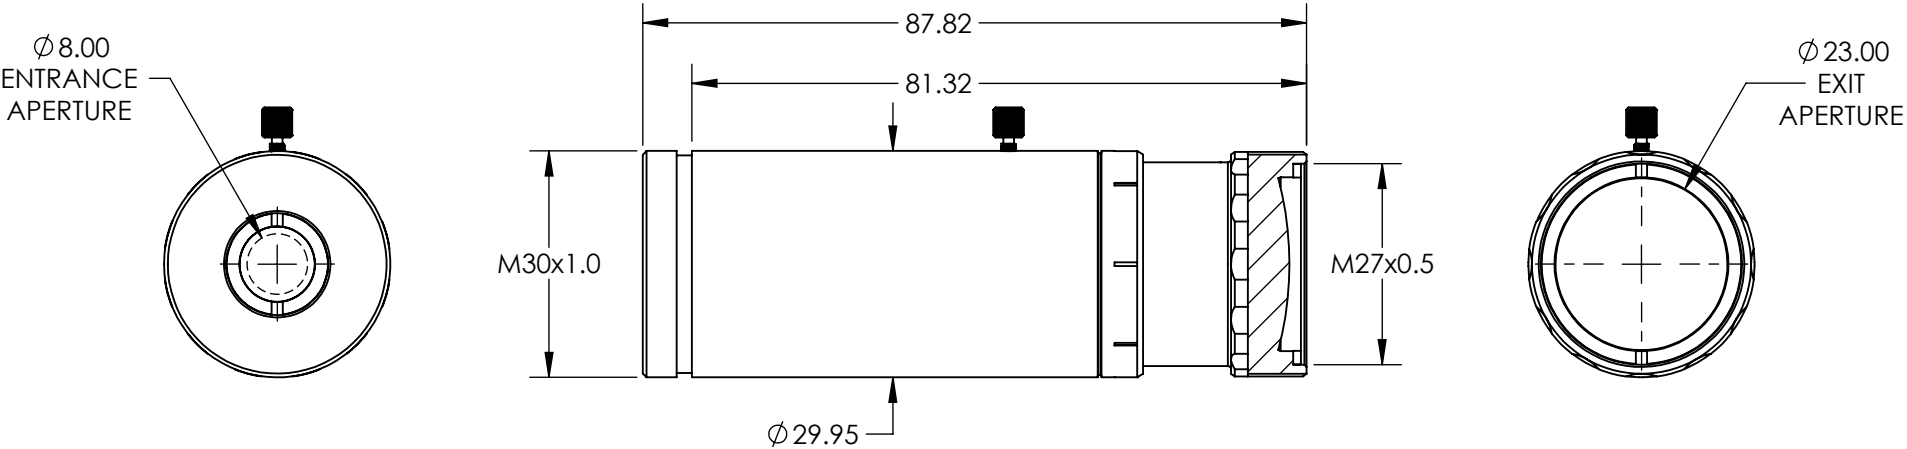

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR
REFERENCE ONLY

 Edmund Optics®			
THIRD ANGLE PROJECTION 		TITLE	3X, NIR Vega™ Broadband Beam Expander
ALL DIMS IN	mm	DWG NO	39743
			SHEET 1 OF 1