## TECHSPEC® BLUE SERIES M12 IMAGING LENSES #83-950 • 6mm • f/8.0

TECHSPEC<sup>®</sup> Blue Series M12 Imaging Lenses feature high resolution performance, along with the same great versatility of our TECHSPEC<sup>®</sup> Green Series M12 Imaging Lenses. Each lens consists of several precision glass elements mounted in a compact, aluminum housing. TECHSPEC<sup>®</sup> Blue Series M12 Imaging Lenses are ideal for automotive, industrial, and medical imaging application.




Focal Length:	6mm 150mm - ∞				
Working Distance <sup>1</sup> :					
Max. Sensor Format:	1/3" M12 x 0.5 (S-Mount)				
Camera Mount:					
Aperture (f/#):	f/8.0				
Distortion %2:	<13.73%				
Object Space NA <sup>2</sup> :	0.002417				

Magnification Range:	0 - 0.039X				
Туре:	Micro-Video Lens 14.1mm 4g				
Length:					
Weight:					
RoHS:	Compliant 5 (4)				
Number of Elements (Groups):					
AR Coating:	400-700nm MgF <sub>2</sub>				

1. From front housing 2. At Minimum W.D.

At Minimum W.D. (150mm)										
Sensor Size	1/4"	1/3"	1/2.5"	1/2"	1/1.8"	2/3"	1"	28.7mm	4/3"	
Field Of View <sup>3</sup>	96.5mm - 35.2°	134.6mm - 47.7°	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

3. Horizontal FOV on Standard (4:3) sensor format. Min W.D.

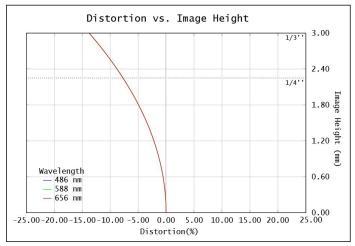




Figure 1: Distortion at the maximum sensor format. Positive values correspond to pincushion distortion, negative values correspond to barrel distortion.


Figure 2: Relative illumination (center to corner)


In both plots, field points corresponding to the image circle of common sensor formats are included. Plots represent theoretical values from lens design software. Actual lens performance varies due to manufacturing tolerances.



www.edmundoptics.com | +1-856-547-3488 101 East Gloucester Pike, Barrington, NJ 08007

## MTF & DOF: f/8.0 WD: 150mm (Minimum W.D.) HORIZONTAL FOV: 134mm

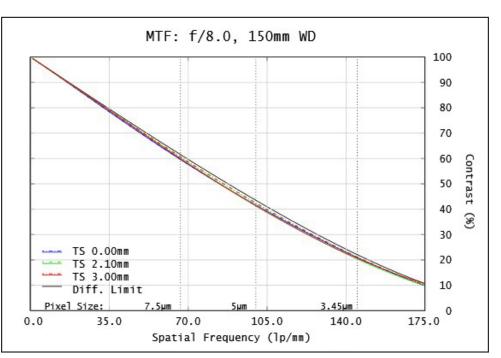



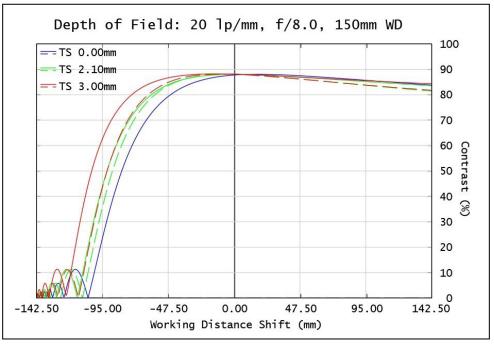



Figure 4: Polychromatic diffraction through-focus MTF at 20 linepairs/mm (image space). Contrast is plotted to two times the focus distance. Note object spatial frequency changes with working distance.


Plots represent theoretical values from lens design software. Actual lens performance varies due to manufacturing tolerances.



## MTF & DOF: f/8.0 WD: 225mm HORIZONTAL FOV: 200mm



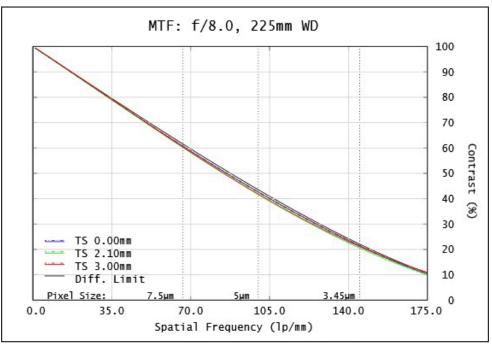



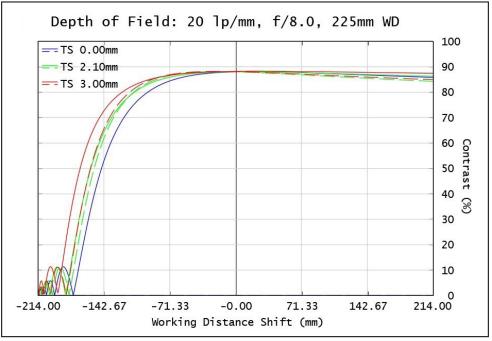



Figure 6: Polychromatic diffraction through-focus MTF at 20 linepairs/mm (image space). Contrast is plotted to two times the focus distance. Note object spatial frequency changes with working distance.


Plots represent theoretical values from lens design software. Actual lens performance varies due to manufacturing tolerances.



## MTF & DOF: f/8.0 WD: 250mm HORIZONTAL FOV: 222mm



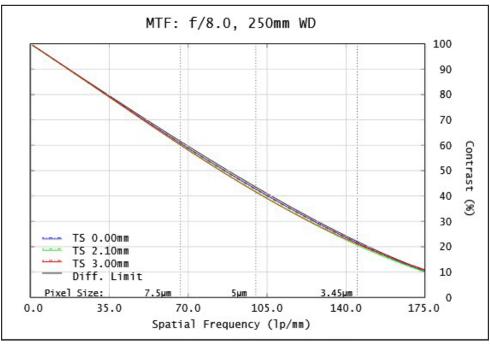



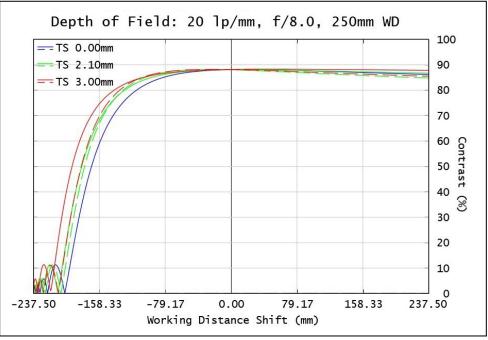


Figure 8: Polychromatic diffraction through-focus MTF at 20 linepairs/mm (image space). Contrast is plotted to two times the focus distance. Note object spatial frequency changes with working distance.

Plots represent theoretical values from lens design software. Actual lens performance varies due to manufacturing tolerances.

