

## NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 8° 36' NOMINAL BLAZE WAVELENGTH: 500nm GROOVE DENSITY: 600 GROOVES/mm

4. EDGES GROUND

5. Rohs Compliant



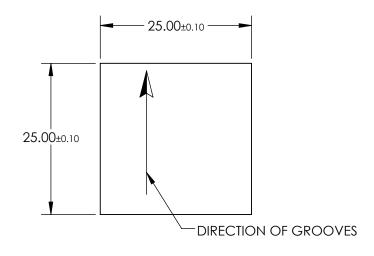

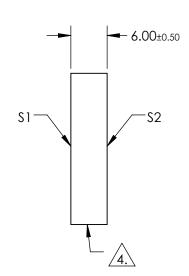

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

|  | Edmund       | Optics® |
|--|--------------|---------|
|  | 1 1 0 1 TM / | ^^ ^    |

|                |             |             |                           |                        |        | Richardson Granngs''' 600 Grooves, 25 x |                 |
|----------------|-------------|-------------|---------------------------|------------------------|--------|---|-----------------|
|                | \$1         | \$2         | THIRD ANGLE<br>PROJECTION | THIRD ANGLE PROJECTION |        | 25mm, 500nm, Plane Ruled Reflection     |                 |
| SHAPE          | PLANO       | PLANO       |                           |                        |        | Gra                                     |                 |
| CLEAR APERTURE | 22.5 x 22.5 | 22.5 x 22.5 | ALL DIMS IN               | mm                     | DWG NO | 15764                                   | SHEET<br>1 OF 1 |