NOTES:


- 1. SUBSTRATE MATERIAL: Fused Silica
- 2. SURFACE \$2 TO BE PARALLEL WITH \$1 TO 30 arcsec
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

S1: SILVER WITH MULTILAYER OVERCOAT R(avg) > 99% @ 600 - 1000nm @ 0° AOI, Rs > 99% @ 540 - 1000nm @ 45° AOI, Rp > 98.5% @ 730 - 870nm @ 45° AOI

S2: NONE

4. FINE GRIND SURFACE

5. ROHS COMPLIANT

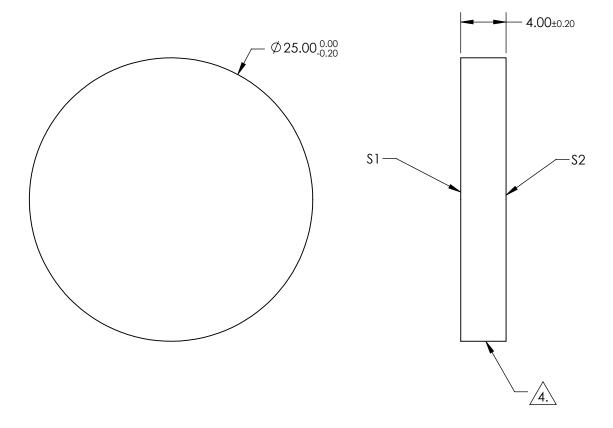

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SURFACE QUALITY	20 - 10	COMMERCIAL POLISH	
SURFACE FLATNESS	λ/10	N/A	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	

HIRD ANGLE TITLE		TITLE	MIRROR 1/10 WAVE UF SILVER 600-1050NM 25mm DIA	
ALL DIMS IN	mm	DWG NO	21985	SHEET 11 OF 20