NOTES:

1. SUBSTRATE: VACUUM UV GRADE CaF2

2. COATING


S1: VIS-NIR (400-1000nm) S2: VIS-NIR (400-1000nm)

PROTECTED AS NEEDED

3. CENTERING: 1.72 arcmin

4. RoHS: COMPLIANT

BEVEL

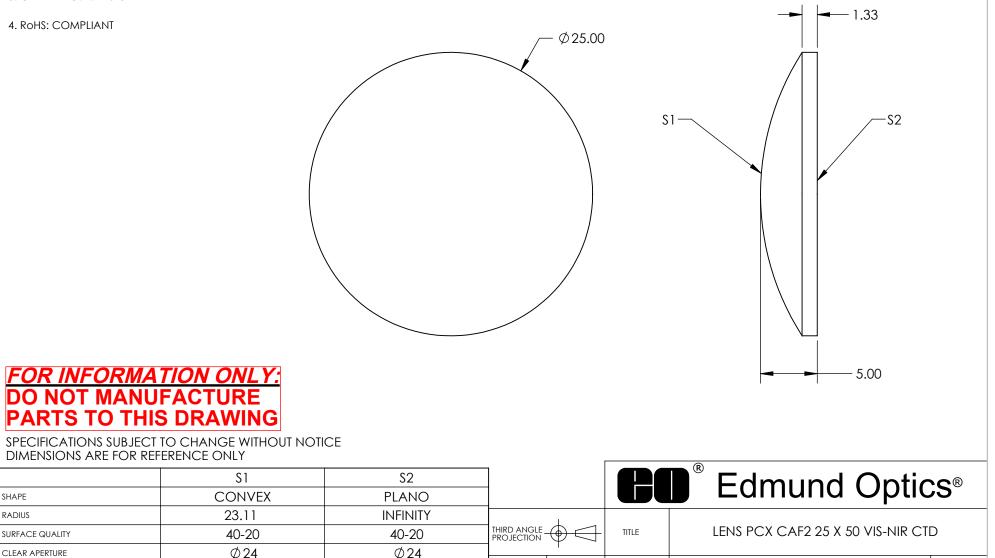

ALL DIMS IN

PROTECTED AS NEEDED

mm

DWG NO

22519

SHEET

5 OF 20