NOTES:


1. SUBSTRATE: VACUUM UV GRADE CaF2


2. COATING

\$1: VIS-NIR (400-1000nm) \$2: VIS-NIR (400-1000nm)

3. CENTERING: 1 arcmin

4. RoHS: COMPLIANT

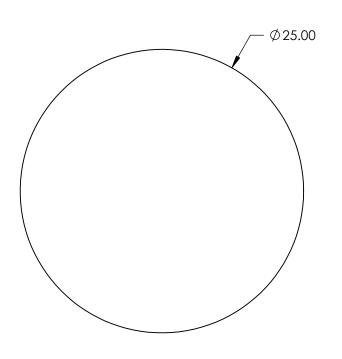

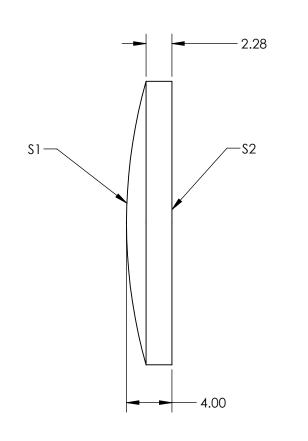

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2		
SHAPE	CONVEX	PLANO		
RADIUS	46.21	INFINITY		
SURFACE QUALITY	40-20	40-20		
CLEAR APERTURE	Ø24	Ø24		
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED		

			Edmund Optics®				
			Lamana Optics				
	T. II.D	<u></u>		15/10 DOV 0.450 05 V 100 V 10 V 10 DO			
	THIRD ANGLE PROJECTION	Θ	TITLE	LENS PCX CAF2 25 X 100 VIS-NIR CTD			
		·			CLIEFT		
D	ALL DIMS IN	mm	DWG NO	22521	SHEET 7 OF 20		