




NOTES:

- 1. SUBSTRATE:
ZERODUR®
- 2. S2 TO BE PARALLEL TO S1 TO WITHIN <30 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

S1&S2:
Ravg >98% @ 400 - 750nm (0 - 45°) Ravg >99% @ 400 - 750nm (0°)

4. FINE GRIND SURFACE

5. ROHS COMPLIANT

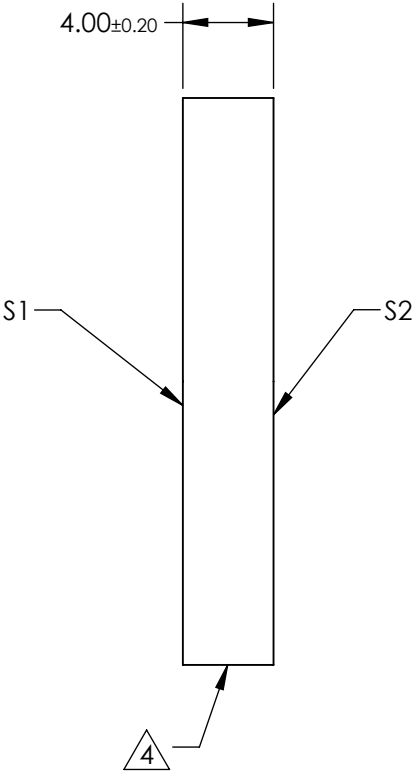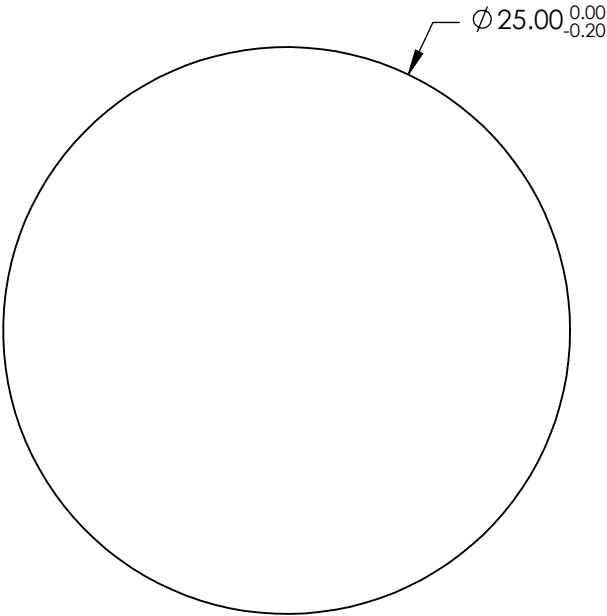


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	COMMERCIAL POLISH
CLEAR APERTURE	Ø 22.5	N/A
SURFACE FLATNESS	λ/10	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE
PROJECTION



ALL DIMS IN

mm



Edmund Optics®

TITLE

25mm Dia. 400 - 750nm Broadband λ/10
ZERODUR® Mirror

DWG NO

24027

SHEET
10 OF 18