
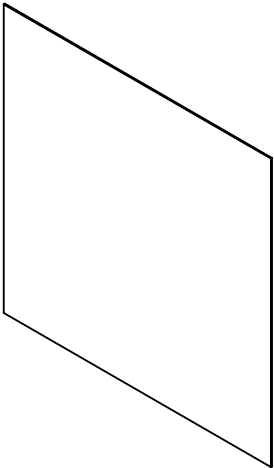
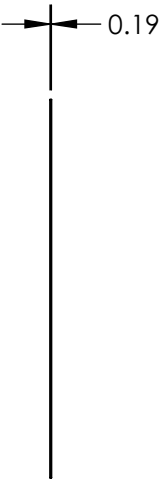
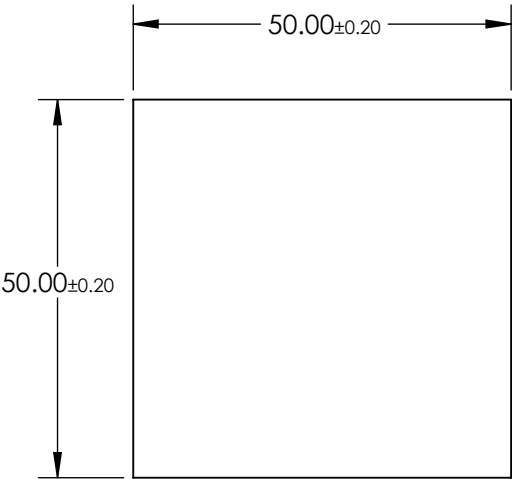



- NOTES:
- 1. SUBSTRATE: CTA (Cellulose Triacetate)
 - 2. OPERATING TEMPERATURE: -20 TO +70 °C
 - 3. WAVELENGTH RANGE: 320 - 750NM
 - 4. COATING: UNCOATED
 - 5. TRANSMISSION (%)
 - SINGLE: 39 (325nm-400nm)
 - CROSSED: 0.04 (325nm-400nm)
 - 6. ROHS COMPLIANT



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION 		 Edmund Optics®	
TITLE		50 x 50mm UV Polarizing Film	
ALL DIMS IN	mm	DWG NO	SHEET
		25110	1 OF 1