
NOTES:

1. SUBSTRATE: SODIUM SILICATE GLASS DOPED WITH SILVER NANOPARTICLES

- 2. COATING: Double-Side AR
- 3. TYPICAL ENERGY DENSITY LIMIT: 10 W/cm2
- 4. EXTINCTION RATIO: >10,000:1
- 5. WAVELENGTH RANGE: 1500-1600
- 6. ROHS COMPLIANT

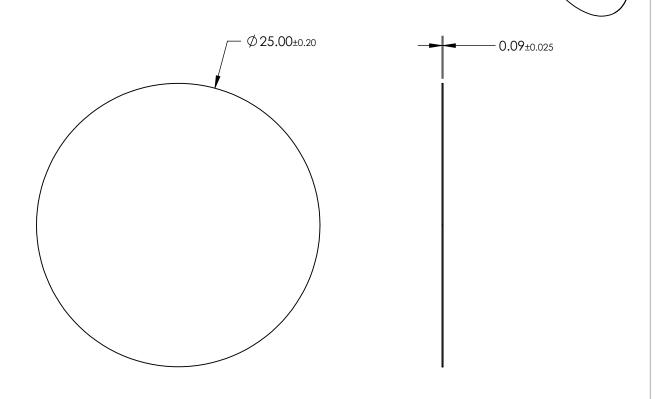

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	S1 PLANO	S2 PLANO			B	Edmund Optic	CS ®
SURFACE QUALITY	40 - 20	40 - 20		I		Ultra-Thin Polarizer, 1550nm, 25mm Dia	a AR
TRANSMISSION (%)	>96	>96			TITLE		
ACCEPTANCE ANGLE	±20°	±20°		I			CUEFT
BEVEL MAX FACE	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	26655	SHEET 12 OF 12