NOTES:

1. SUBSTRATE:


FUSED SILICA CORNING 7980

2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE) \$1&\$2: UV-VIS (250-700nm) Ravg ≤1.5% @ 250 - 700nm Rabs ≤1.00% @ 350 - 450nm

4. SIX SIDEWALLS:

SURFACE ACCURACY: COMMERCIAL POLISH

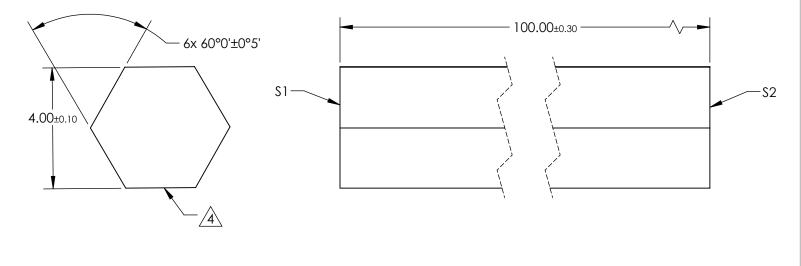

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY



SHAPE SURFACE FLATNESS	S1 PLANO	S2 PLANO		$\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{$	TITLE	4mm Aperture x 100mm L, UV-VIS Co Low NA, Fused Silica Light Pipe	
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	26556	SHEET 12 OF 24