
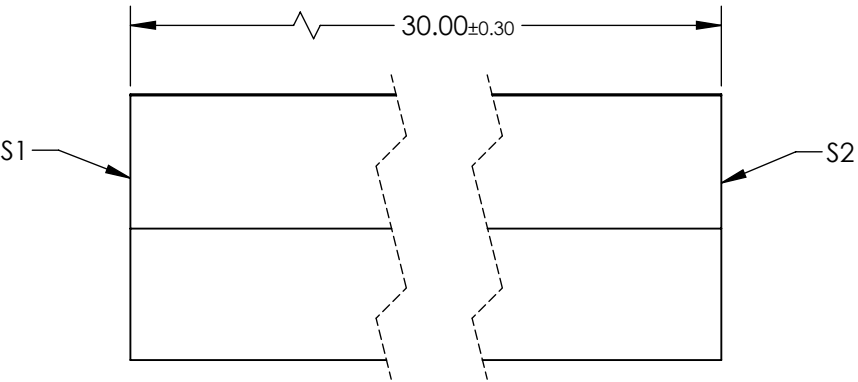
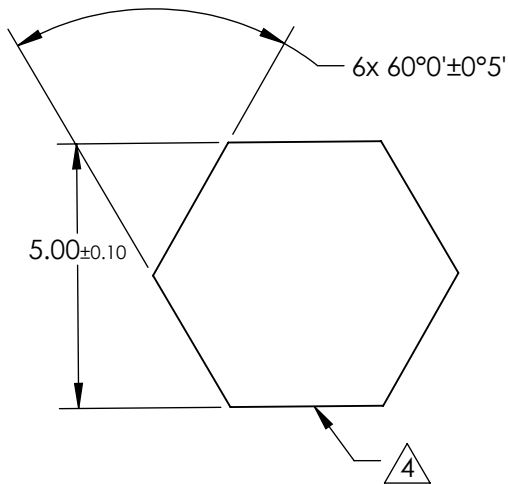


NOTES:
1. SUBSTRATE:
FUSED SILICA CORNING 7980

2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE)
S1&S2: UV-VIS (250-700nm)
Ravg ≤1.5% @ 250 - 700nm
Rabs ≤1.00% @ 350 - 450nm


4. SIX SIDEWALLS:
SURFACE ACCURACY: COMMERCIAL POLISH

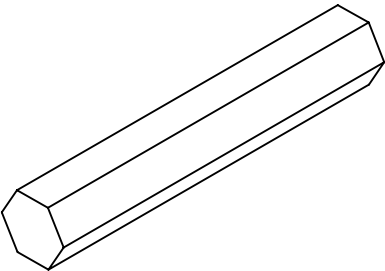

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

	S1	S2	<div>THIRD ANGLE PROJECTION</div> 		TITLE	5mm Aperture x 30mm L, UV-VIS Coated, High NA, Fused Silica Light Pipe	
SHAPE	PLANO	PLANO					
SURFACE FLATNESS	1λ	1λ	<div>ALL DIMS IN</div> <div>mm</div>		DWG NO	26557	SHEET 13 OF 24
SURFACE QUALITY	60-40	60-40					