NOTES

- 1. SUBSTRATE: Fused Silica
- 2. COATING (APPLY ACROSS CLEAR APERTURE)


\$1 & \$2: NONE

3. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN <1 ARCMIN



FINE GRIND SURFACE

- 5. TRANSMITTED WAVEFRONT DISTORTION: ≤ 0.25 WAVE @632.8nm
- Rohs Compliant

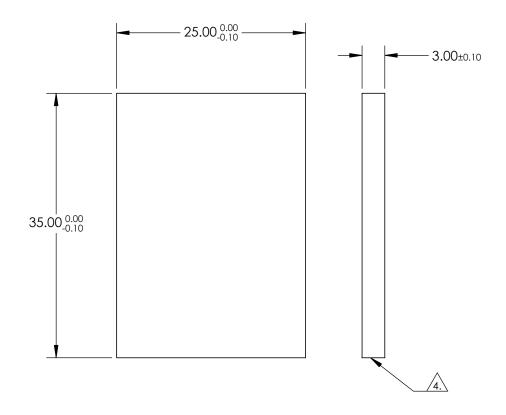

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

			_	
	\$1	\$2		
SHAPE	PLANO	PLANO		
SURFACE QUALITY	40 - 20	40 - 20	THIRD ANGLE _ PROJECTION	
CLEAR APERTURE	22.50 x 31.50	22.50 x 31.50		
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	

			Edmund Optics®			
	THIRD ANGLE SIlica Window		Fused			
D	ALL DIMS IN	mm	DWG NO	29298	SHEET 1 OF 1	