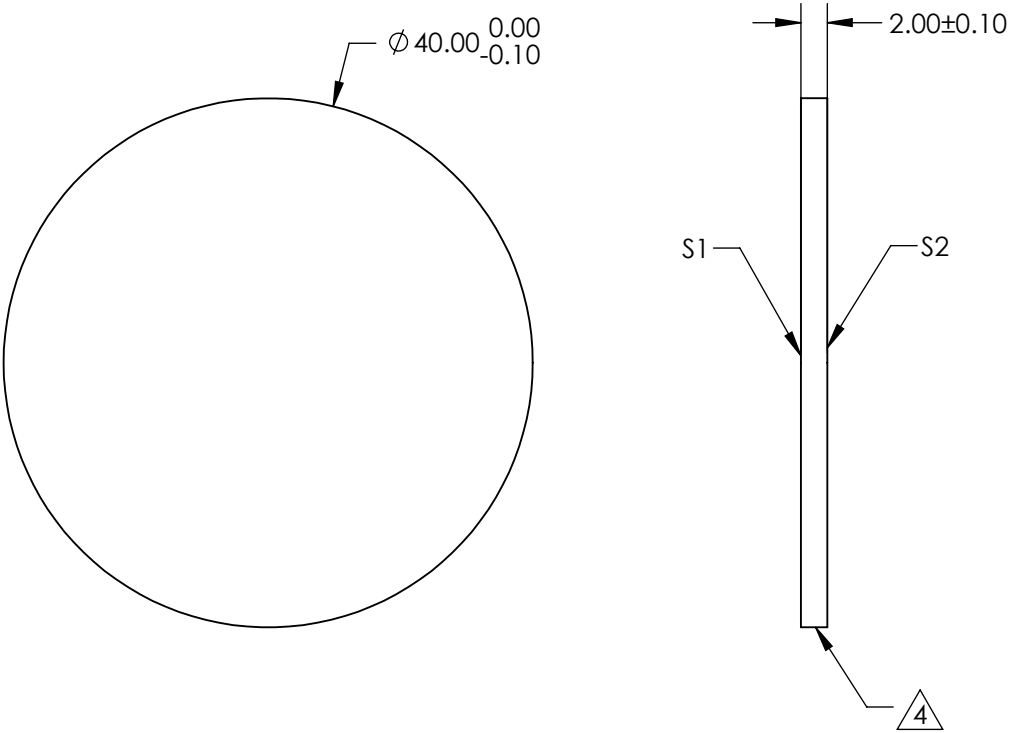


- NOTES:
- 1. SUBSTRATE:
FUSED SILICA (CORNING 7980)
 - 2. S1 TO BE PARALLEL WITH S2 TO WITHIN <1 ARCMIN
 - 3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: UV-VIS (250-700nm)
R(ABS) ≤1.0% @ 350 - 450nm
R(AVG) ≤1.5% @ 250 - 700nm



4. FINE GRIND SURFACE

5. ROHS COMPLIANT



FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2			 Edmund Optics®		
SHAPE	PLANO	PLANO	<div>THIRD ANGLE PROJECTION</div> 	TITLE	40mm Dia., 2mm Thick, UV-VIS Coated, λ/4 Fused Silica Window		
SURFACE QUALITY	40 - 20	40 - 20					
CLEAR APERTURE	Ø 36.00	Ø 36.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	72396	SHEET 56 OF 84