See all 3 Products in Family

TECHSPEC® 25mm VIS 0 Phase Correcting, Schmidt Prism

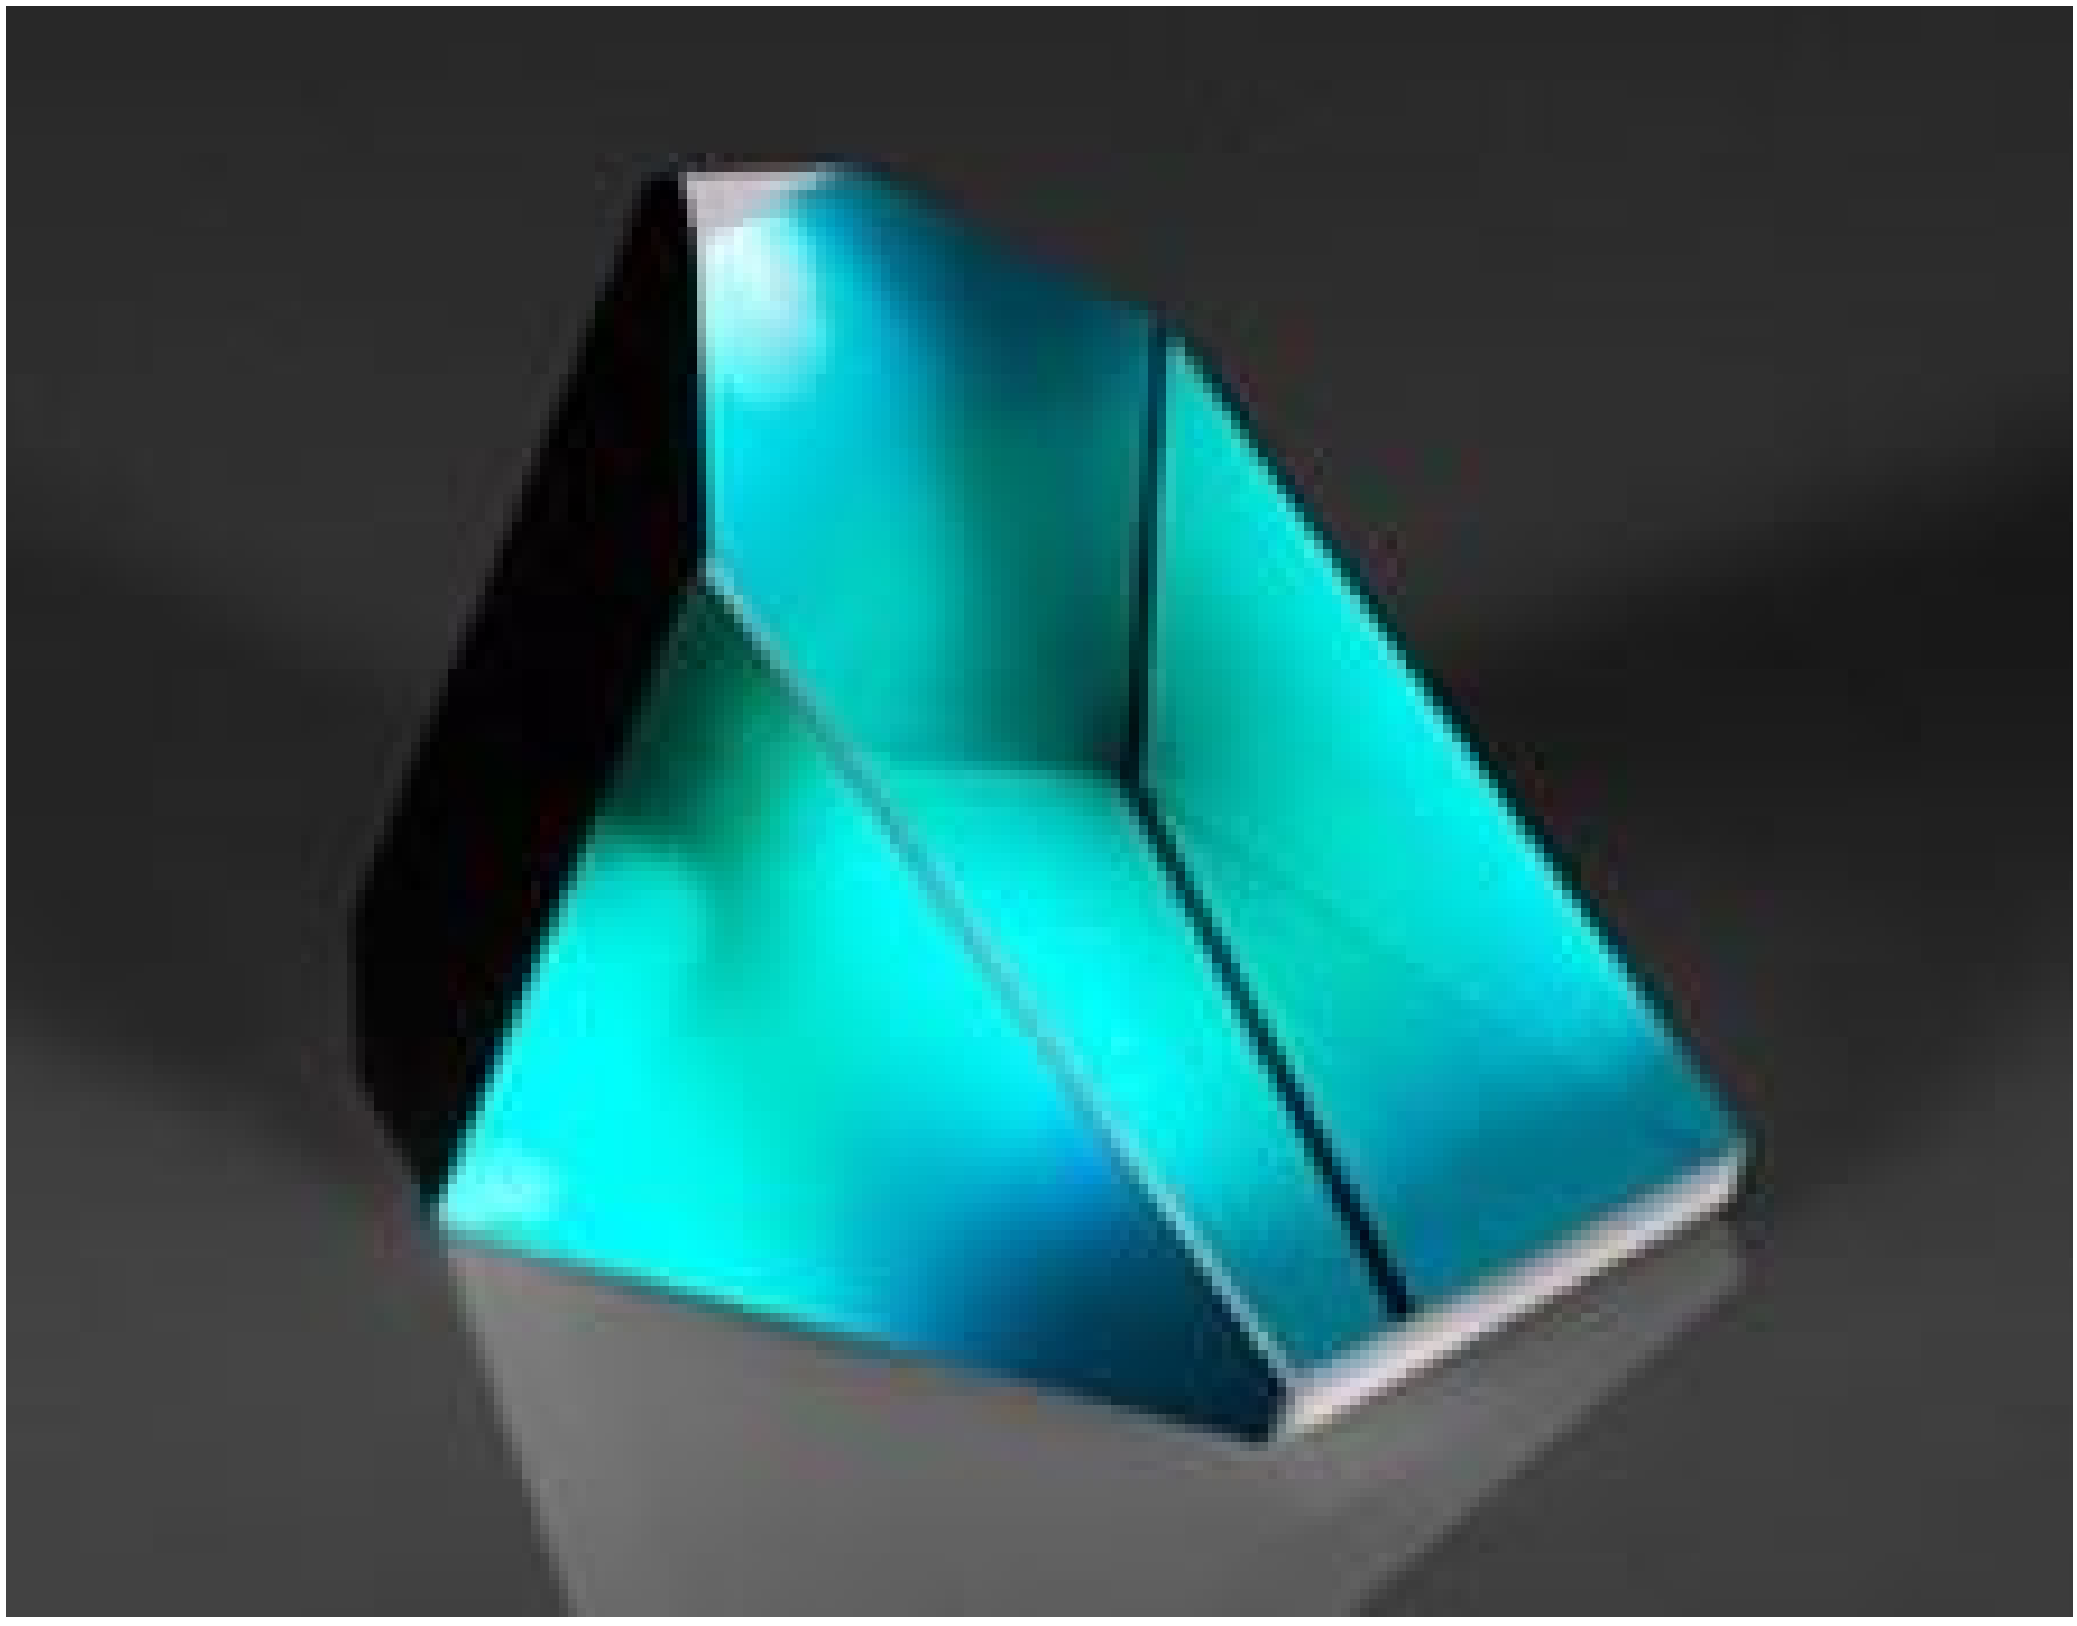

Stock **#13-805** **5 In Stock**

- 1 + **€655**.00

ADD TO CART

Volume Pricing	
Qty 1-10	**€655,00** each
Qty 11+	**€524,00** each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Type:
Schmidt Prism

Physical & Mechanical Properties

Height (mm):
41.3

Length (mm):
36.74

Dimensional Tolerance (mm):
±0.1

Bevel:
Protective as needed

Width (mm):
25.00

Optical Properties

Coating:
VIS 0° Phase Correcting

Substrate:
N-BK7

Surface Quality:
40-20

Angle Tolerance (arcmin):
5.00

Image Orientation:
Right-Handed

Coating Specification:
Entrance/Exit Faces: R_{avg} ≤0.4% @ 425 - 675nm
Roof: Photopic deviation δp < 5%

Ray Deviation (°):
45

Wavelength Range (nm):
400 - 700

Power (fringes) @ 632.8nm:
1.00

Irregularity (fringes) @ 632.8nm:
0.25

Regulatory Compliance

Certificate of Conformance:
View

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our custom manufacturing capabilities or submit an inquiry here.

Product Details

- Ray Deviation of 45°
- Right Handed Image
- 5 Arcsecond Roof Angle Tolerance
- Combine with Half-Penta Prism to Create Schmidt-Pechan Prism

Schmidt prisms are ideal for creating a right handed image with a ray deviation of 45°. They are similar in function to TECHSPEC® Amici Roof Prisms, however the 45° deviation makes Schmidt prisms especially useful in eyepiece assemblies and imaging systems requiring a path bend. The aluminized roof surfaces enhance the overall efficiency while the 5arcsecond roof angle tolerance increases the prism's resolution. TECHSPEC® Schmidt Prisms can be combined with TECHSPEC® Half-Penta Prisms to create a Pechan prism.

Technical Information

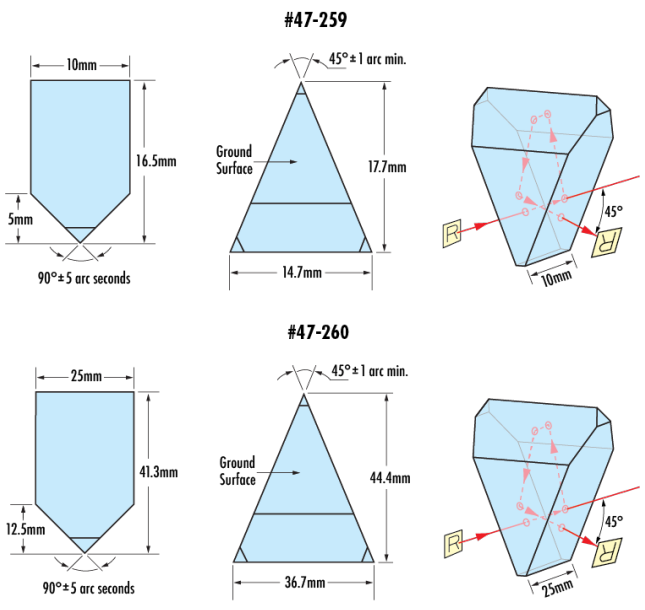

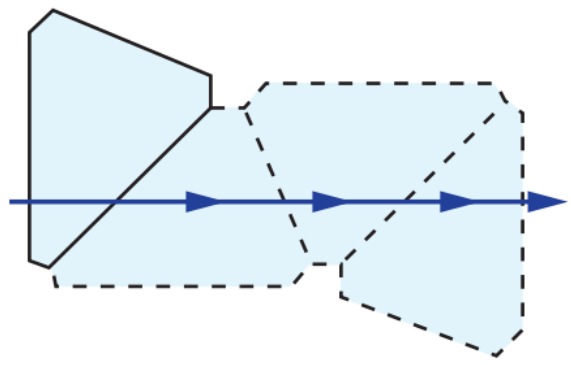

Schmidt Prism Tunnel Diagram

;