

[All Products](#) / [Optics](#) / [Windows](#) / [Ultra-Thin N-BK7 Windows](#)

[See all 40 Products in Family](#)

TECHSPEC®


30mm Diameter

See More by [SCHOTT Optical Components](#)

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region: European Union

Submit

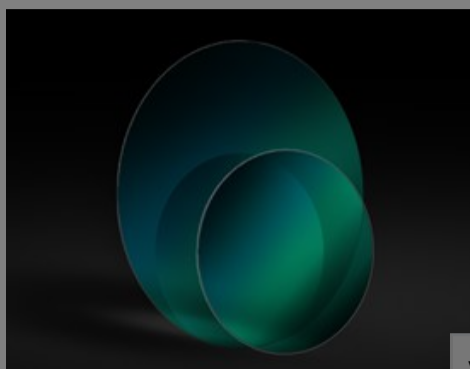

Ultra-Thin N-BK7 Windows

Stock #22-041 **3 In Stock**

1

€184^{,00}

ADD TO CART

Volume Pricing	
Qty 1-5	€184,00 each
Qty 6-25	€145,00 each
Qty 26-49	€138,00 each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

- STEP:step
- PDF Drawing:pdf
- IGES:igs
- eDrawing:eprt
- EO Spec Sheet
- [Download All](#)

General

Type: Protective Window	Type of Window: Glass
--------------------------------	------------------------------

Physical & Mechanical Properties

Clear Aperture CA (mm): 27.00	Diameter (mm): 30.00 +0.00/-0.10
Thickness (mm): 0.20 ±0.025	Bevel: Protective as needed
Edges: Fine Ground	Parallelism (arcsec): <30
Poisson's Ratio: 0.21	Young's Modulus (GPa): 82
Knoop Hardness (kg/mm²): 610.00	

Optical Properties

Coating: VIS-NIR (400-1000nm)	Substrate: N-BK7
Index of Refraction (n_d): 1.516	Surface Quality: 40-20
Transmitted Wavefront, P-V: λ/2	Abbe Number (ν_d): 64.17
Coating Specification: R _{abs} ≤0.25% @ 880nm R _{avg} ≤1.25% @ 400 - 870nm	Wavelength Range (nm): 400 - 1000

$R_{avg} \leq 1.25\%$ @
890 - 1000nm

Damage Threshold, By Design: ①
5 J/cm² @
532nm, 10ns

Material Properties

Density (g/cm³): 2.51

(10⁻⁶/°C): +300°C)

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region:

Regulatory Compliance

RoHS 2015: **Compliant**

Certificate of Conformance: **View**

Reach 235: **Compliant**

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Product Details


- Ultra-Thin 0.20mm Thickness
- Precision N-BK7 Substrate
- Extremely Lightweight

TECHSPEC® Ultra-Thin N-BK7 Windows are our thinnest windows available and are at least 1/10 the thickness of our traditional N-BK7 windows. Their extremely thin designs make them ideal for both weight and size-sensitive applications. Additionally, their high tolerance design yields minimal beam distortion and scatter. TECHSPEC® Ultra-Thin N-BK7 Windows are available uncoated or with a MgF2 anti-reflection coating. For custom sizes or coating options, please contact our [Sales Department](#).

Note: The Ultra-Thin N-BK7 Windows are very fragile. Handle these windows with care.

Technical Information

Uncoated N-BK7 Typical Transmission

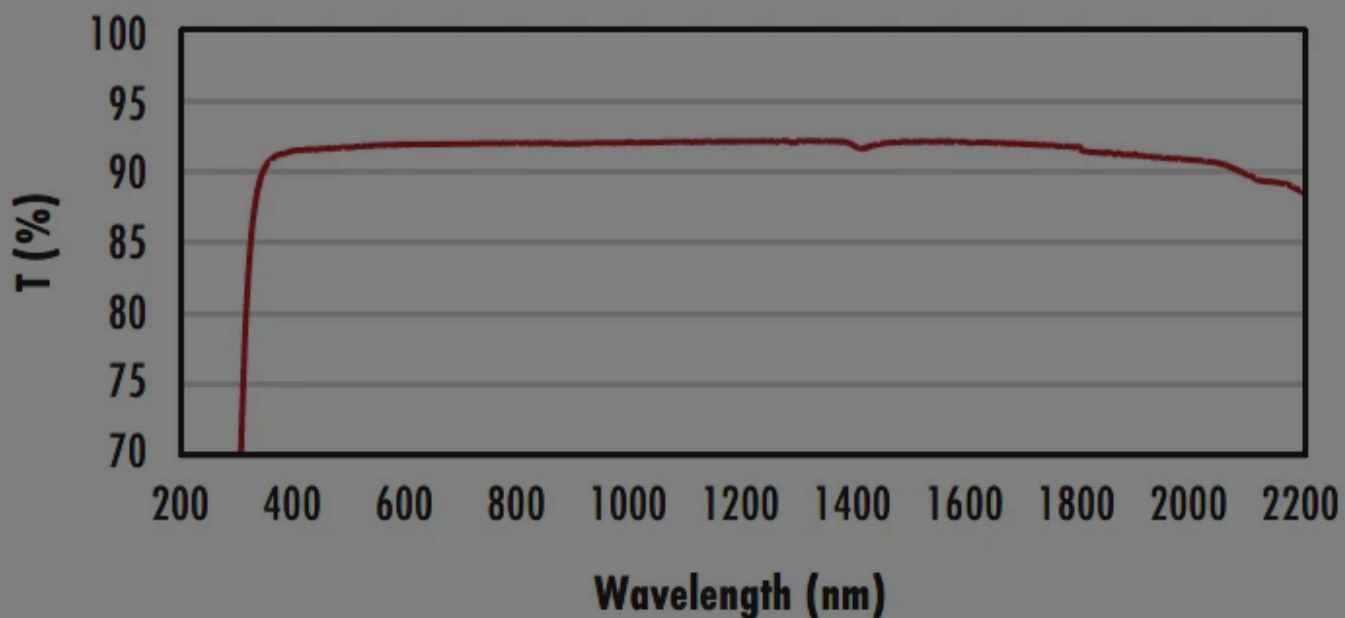

Typical transmission of a 3mm thick, uncoated N-BK7 window across the UV - NIR spectra.

[Click Here to Download Data](#)

N-BK7 with MgF₂ Coating Typical Transmission



Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region:

Typical transmission of a 3mm thick N-BK7 window with MgF₂ (400-700nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 1.75\% \text{ @ } 400 - 700\text{nm (N-BK7)}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

N-BK7 with VIS-EXT Coating Typical Transmission



Typical transmission of a 3mm thick N-BK7 window with VIS-EXT (350-700nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.5\% \text{ @ } 350 - 700\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

N-BK7 with VIS-NIR Coating Typical Transmission



Typical transmission of a 3mm thick N-BK7 window with VIS-NIR (400-1000nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$\begin{aligned} R_{abs} &\leq 0.25\% \text{ @ } 880\text{nm} \\ R_{avg} &\leq 1.25\% \text{ @ } 400 - 870\text{nm} \\ R_{avg} &\leq 1.25\% \text{ @ } 890 - 1000\text{nm} \end{aligned}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

N-BK7 with VIS 0° Coating Typical Transmission



Typical transmission of a 3mm thick N-BK7 window with VIS 0° (425-675nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.4\% @ 425 - 675nm$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

N-BK7 with YAG-BBAR Coating Typical Transmission



Typical transmission of a 3mm thick N-BK7 window with YAG-BBAR (500-1100nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{abs} \leq 0.25\% @ 532nm$$

$$R_{abs} \leq 0.25\% @ 1064nm$$

$$R_{avg} \leq 1.0\% @ 500 - 1100nm$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

N-BK7 with NIR I Coating Typical Transmission



Typical transmission of a 3mm thick N-BK7 window with NIR I (600 - 1050nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.5\% @ 600 - 1050nm$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

N-BK7 with NIR II Coating Typical Transmission

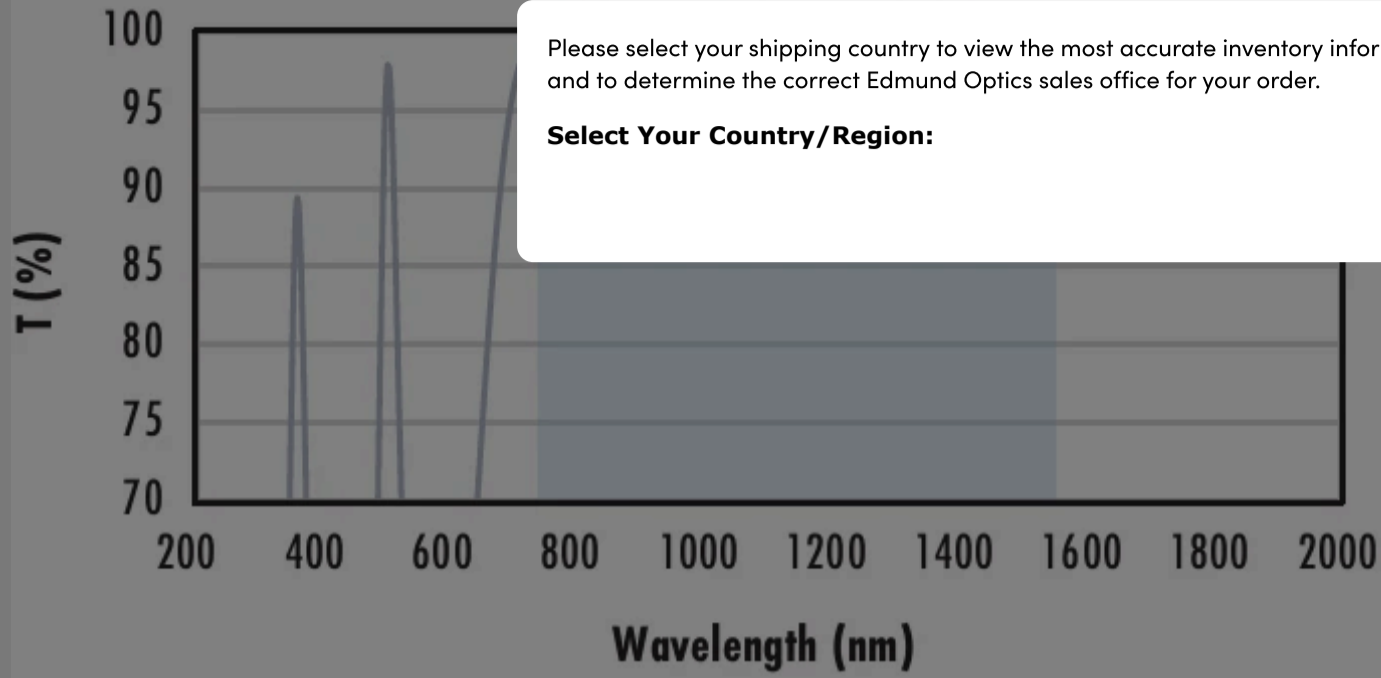

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region:

Typical transmission of a 3mm thick N-BK7 window with NIR II (750 - 1550nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:


- $R_{abs} \leq 1.5\%$ @ 750 - 800nm
- $R_{abs} \leq 1.0\%$ @ 800 - 1550nm
- $R_{avg} \leq 0.7\%$ @ 750 - 1550nm

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)





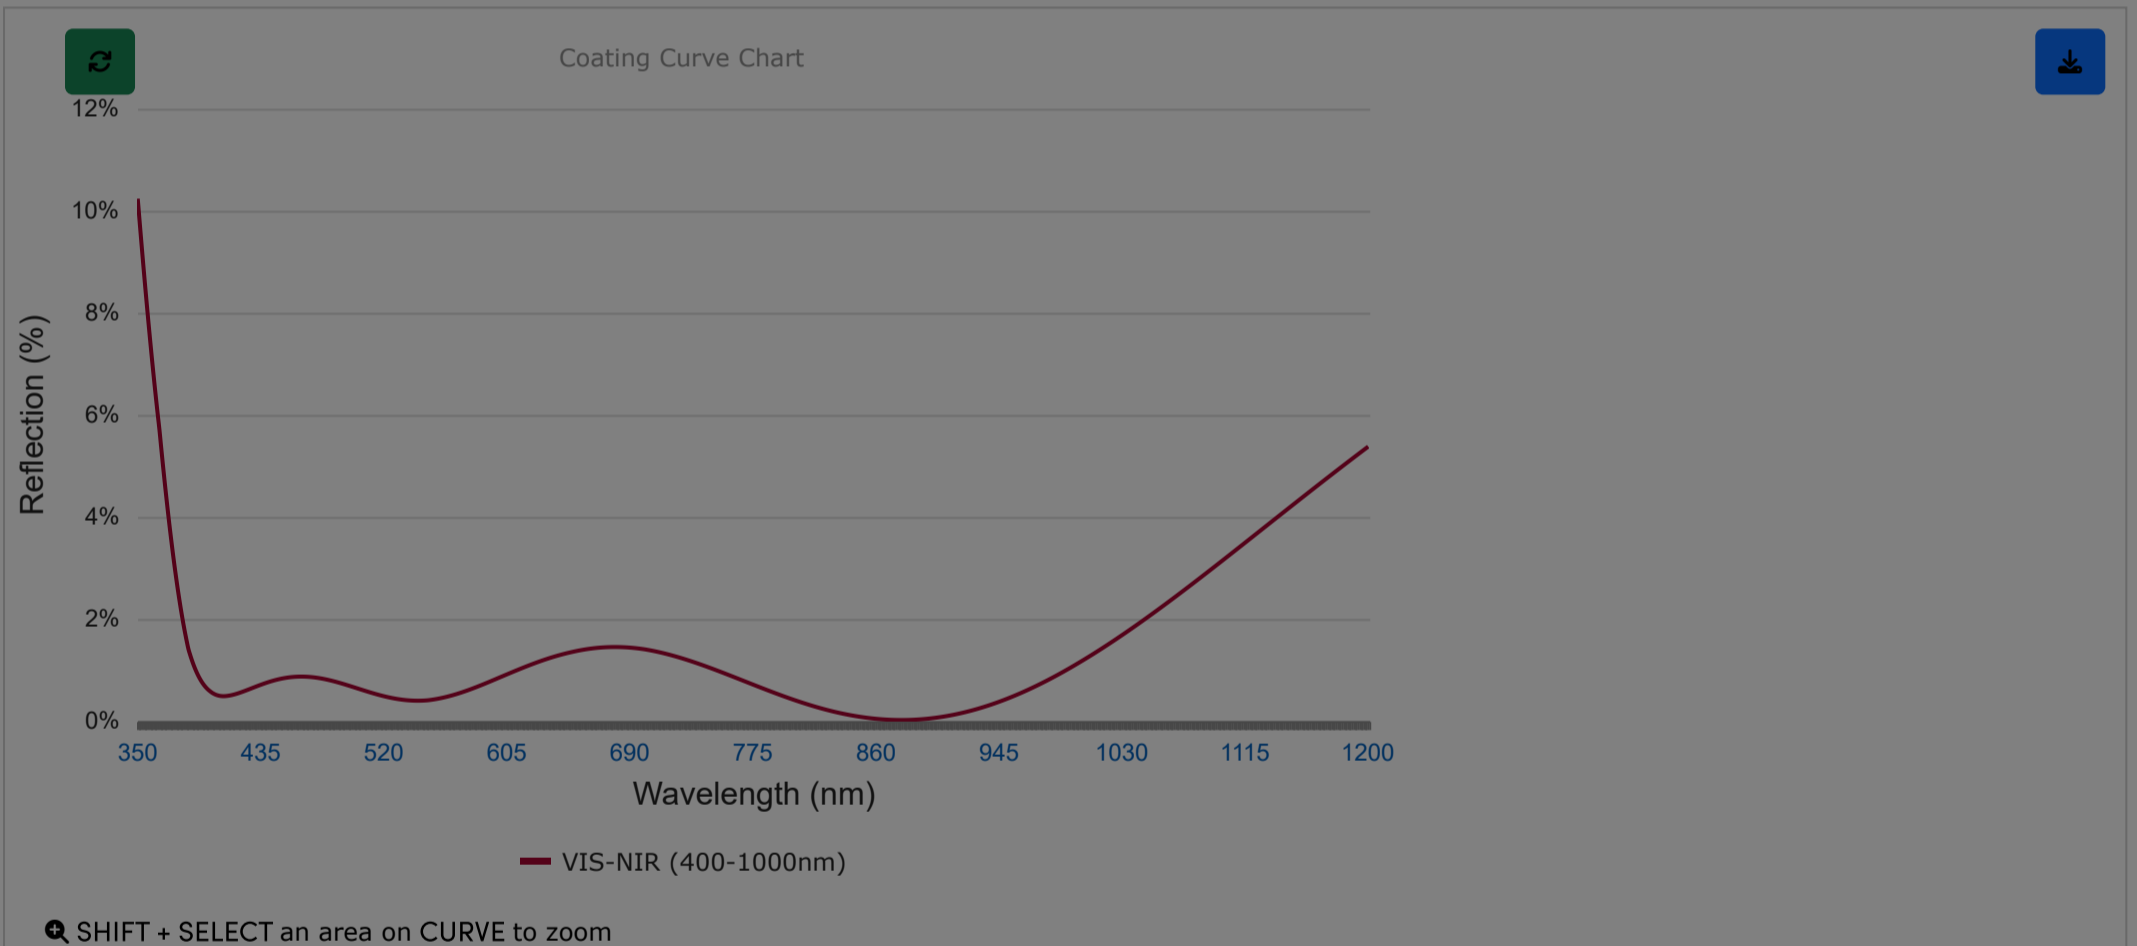

Coating Curves











VIS-NIR (400-1000nm)



Please note that coating performance outside each product's specified design range is theoretical and may vary.

Compatible Mounts

	Title	Type	Compare	Stock Number	Price	Buy
MORE+ 	30.0mm Optic Dia., Optic Mount	Fixed		#64-563	€32,75 Request Quote	12 In Stock <input type="text" value="1"/> 
MORE+ 	30.0mm Optic Dia., Optic Mount	Fixed		#64-564	€32,75 Request Quote	CONTACT US <input type="text" value="1"/> 
MORE+ 	7.0 - 40.0 Optic Height, English Bar-Type Optic Holder	Fixed		#03-676	€106,00 Request Quote	20+ In Stock <input type="text" value="1"/> 

	Title	Type	Compare	Stock Number	Price	Buy
MORE+ 	10.0 - 60.0mm Optic Height, Metric Bar-Type Optic Holder					CONTACT US 1 
MORE+ 	7.0 - 67.0mm Optic Height, English Bar-Type Optic Holder				Request Quote	20+ In Stock 1 
MORE+ 	8.0 - 118.0mm Optic Height, English Bar-Type Optic Holder	Fixed		#03-666	€120,00 Request Quote	20+ In Stock 1 
MORE+ 	4.0 - 36.0mm Optic Dia., Self-Centering Jaw Clamp	Fixed		#16-077	€157,00 Request Quote	5 In Stock 1 
MORE+ 	5.0 - 100.0mm Optic Dia., Self-Centering Jaw Clamp	Fixed		#16-078	€410,00 Request Quote	CONTACT US 1 

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region:

Check out our full selection of mounts [here](#).

Resources

Media Type

- Application Note
- Technical Tool
- Video
- Glossary
- FAQ

APPLICATION NOTE

Anti-Reflection (AR) Coatings

APPLICATION NOTE

An Introduction to Optical Coatings

TECHNICAL TOOL

Beam Displacement Calculator

APPLICATION NOTE

Understanding Optical Windows

VIDEO

Optical Windows Review

APPLICATION NOTE

Optical Glass

[View More](#)

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region: