

5mm Diameter Hydrophobic Window

See More by [SCHOTT Optical Components](#)



Stock #88-356 CLEARANCE 12 In Stock

€29⁹⁵

ADD TO CART

Volume Pricing	
Qty 1+	€29,95 each
Need More?	Request Quote

i Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Protective Window **Type:**

Physical & Mechanical Properties

4.50 **Clear Aperture CA (mm):**

5.00 +0.00/-0.25 **Diameter (mm):**

Thickness (mm):

1.10 ±0.1

Bevel:

Protective as needed

Clear Aperture (%):

90.00

Edges:

Fine Ground

Poisson's Ratio:

0.20

Young's Modulus (GPa):

64

Knoop Hardness (kg/mm²):

480.00

Optical Properties

Coating:

Hydrophobic (425-675nm)

Substrate:

BOROFLOAT®

Index of Refraction (n_d):

1.472

Surface Quality:

80-50

Abbe Number (v_d):

65.41

Coating Specification:

R_{avg} <0.4% @ 425 - 675nm

Wavelength Range (nm):

425 - 675

Material Properties

Density (g/cm³):

2.23

Coefficient of Thermal Expansion CTE (10⁻⁶/°C):

3.25

Contact Angle (°):

>107

Regulatory Compliance

Certificate of Conformance:

[View](#)

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).


Product Details

- Oil and Water Repellent Coating
- Ideal for Industrial and Harsh Environments
- AR Coated for <0.5% Reflection in the Visible Spectrum

Hydrophobic Windows are designed to repel oil (oleophobic) and other liquids (hydrophobic), facilitating cleaning and ensuring maximum transmission of incident light. Hydrophobic treated surfaces cause liquids to form droplets on contact rather than be absorbed or spread across the surface of the optic. Hydrophobic Windows feature anti-reflection coatings to provide less than 0.5% reflection per surface from 425 – 675nm. These windows are ideal for harsh environments, portable handheld devices, or biometric measurement devices.


Indoor Hydrophobic Windows are ideal for applications where cleaning or abrasion is expected while Outdoor Hydrophobic Windows provide better performance both at elevated temperatures and under direct UV light exposure.

Technical Information

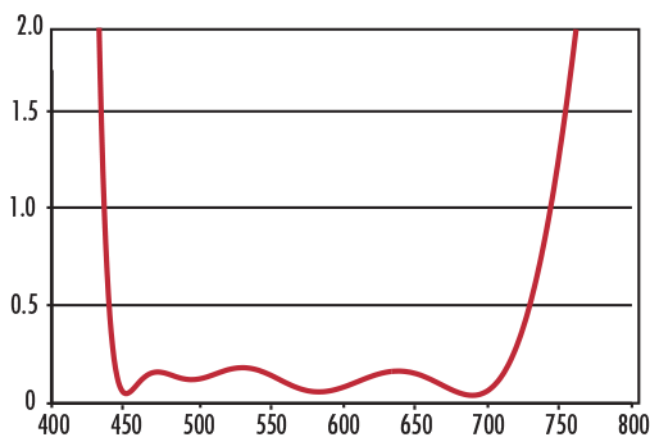

Transmittance (%) vs. Wavelength (nm)

Hydrophobic Window Reflectivity Curve

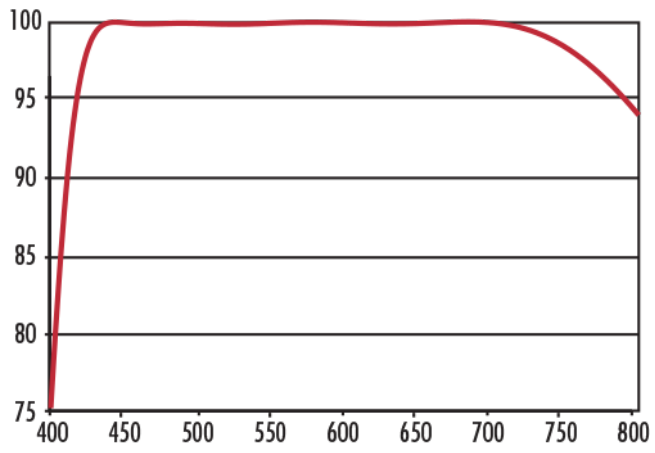

Transmittance (%) vs. Wavelength (nm)

Hydrophobic Window Transmission Curve

Compatible Mounts

;