See all 75 Products in Family

LightPath 355198 | 1.4mm Dia., 0.50 NA, BBAR (1050-1600nm), Molded Aspheric Lens

See More by Lightpath®

Precision Molded Aspheric Lenses

Stock **#16-704** **13 In Stock**

- 1 + **€75**.00

ADD TO CART

Volume Pricing	
Qty 1-10	**€75,00** each
Qty 11-49	**€67,50** each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Lightpath Lens Code:
355198

Type:
Aspheric Lens

Typical Applications:
Collimate or Focus Laser Light

Physical & Mechanical Properties

Diameter (mm):
1.40 ±0.015

Clear Aperture CA (mm):
1.1

Edge Thickness ET (mm):
0.50

Center Thickness CT (mm):
0.71 ±0.03

Bevel:
Protective as needed

Optical Properties

Effective Focal Length EFL (mm):
1.05 @ 1550nm

Numerical Aperture NA:
0.50

Substrate:
D-ZLaF52LA

Focal Length Tolerance (%):
±1

Aspheric Design Wavelength (nm):
1550

Coating:
BBAR (1050-1600nm)

Coating Specification:
R_{abs} <1.0% @ 1050 - 1600nm

Surface Quality:
40-20

f/#:
1.00

Abbe Number (v_d):
40.99

Index of Refraction (n_d):
1.81

Wavelength Range (nm):
1050 - 1600

Working Distance (mm):
0.61

Conjugate Distance:
Infinite

Focal Length Specification Wavelength (nm):
1550

Transmitted Wavefront Error (λ, RMS):
<0.150

Material Properties

Coefficient of Thermal Expansion CTE (10^{-6}/°C):
6.9

Environmental & Durability Factors

Operating Temperature (°C):
≤200

Regulatory Compliance

RoHS 2015:
Compliant

Certificate of Conformance:
View

Reach 247:
Compliant

Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.

Technical Information

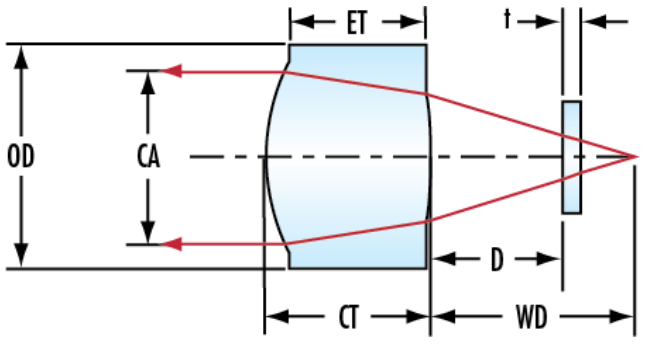

;