

TECHSPEC® UV-NIR, 12.5mm Diameter ND Filter Kit



Stock #88-368

CONTACT US

-

1

+

€695^{.00}

ADD TO CART

Volume Pricing	
Qty 1+	€695,00 each
Need More?	Request Quote

ⓘ

 Prices shown are exclusive of VAT/local taxes

Product Downloads

General	
0.3, 0.5, 1.0, 1.3, 1.5, 2.0	Filters Included :
Neutral Density Filter	Type:
6.00	Number of Filters:
Optical Properties	
Fused Silica (Corning 7980)	Substrate:

Metallic Based ND	Coating:
190 - 1700	Blocking Wavelength Range (nm):
0.19 - 1.7	Wavelength Range (µm):

Regulatory Compliance

View

Certificate of Conformance:

Product Details


UV-NIR Neutral Density Filter kit includes all optical densities. Filter coating is fragile and should be handled with care. Use non-contact cleaning methods only.

- Constant Transmission from 190 – 1700nm
- Can be Stacked to Create Intermediate Density Values
- Multiple Optical Densities Available

TECHSPEC® UV-NIR Neutral Density (ND) Filters are used to attenuate light from the ultraviolet to the near-infrared. TECHSPEC® UV-NIR ND Filters feature excellent parallelism with superior surface characteristics to provide constant, ultra-broadband performance from 190 – 1700nm. These ND filters are ideal for a range of applications including spectroscopy, machine vision, or ellipsometry, or for use with low power lasers. TECHSPEC® UV-NIR Neutral Density (ND) Filters can be stacked to obtain a range of optical densities.

Note: UV-NIR Neutral Density Filter kit includes all optical densities. Filter coating is fragile and should be handled with care. Use non-contact cleaning methods only.

Technical Information

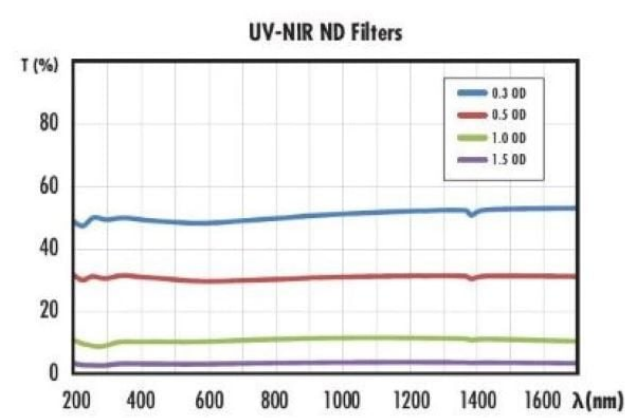

Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools