


[See all 6 Products in Family](#)

## 25mm Dia., Protective Overcoat Wire Grid Polarizer

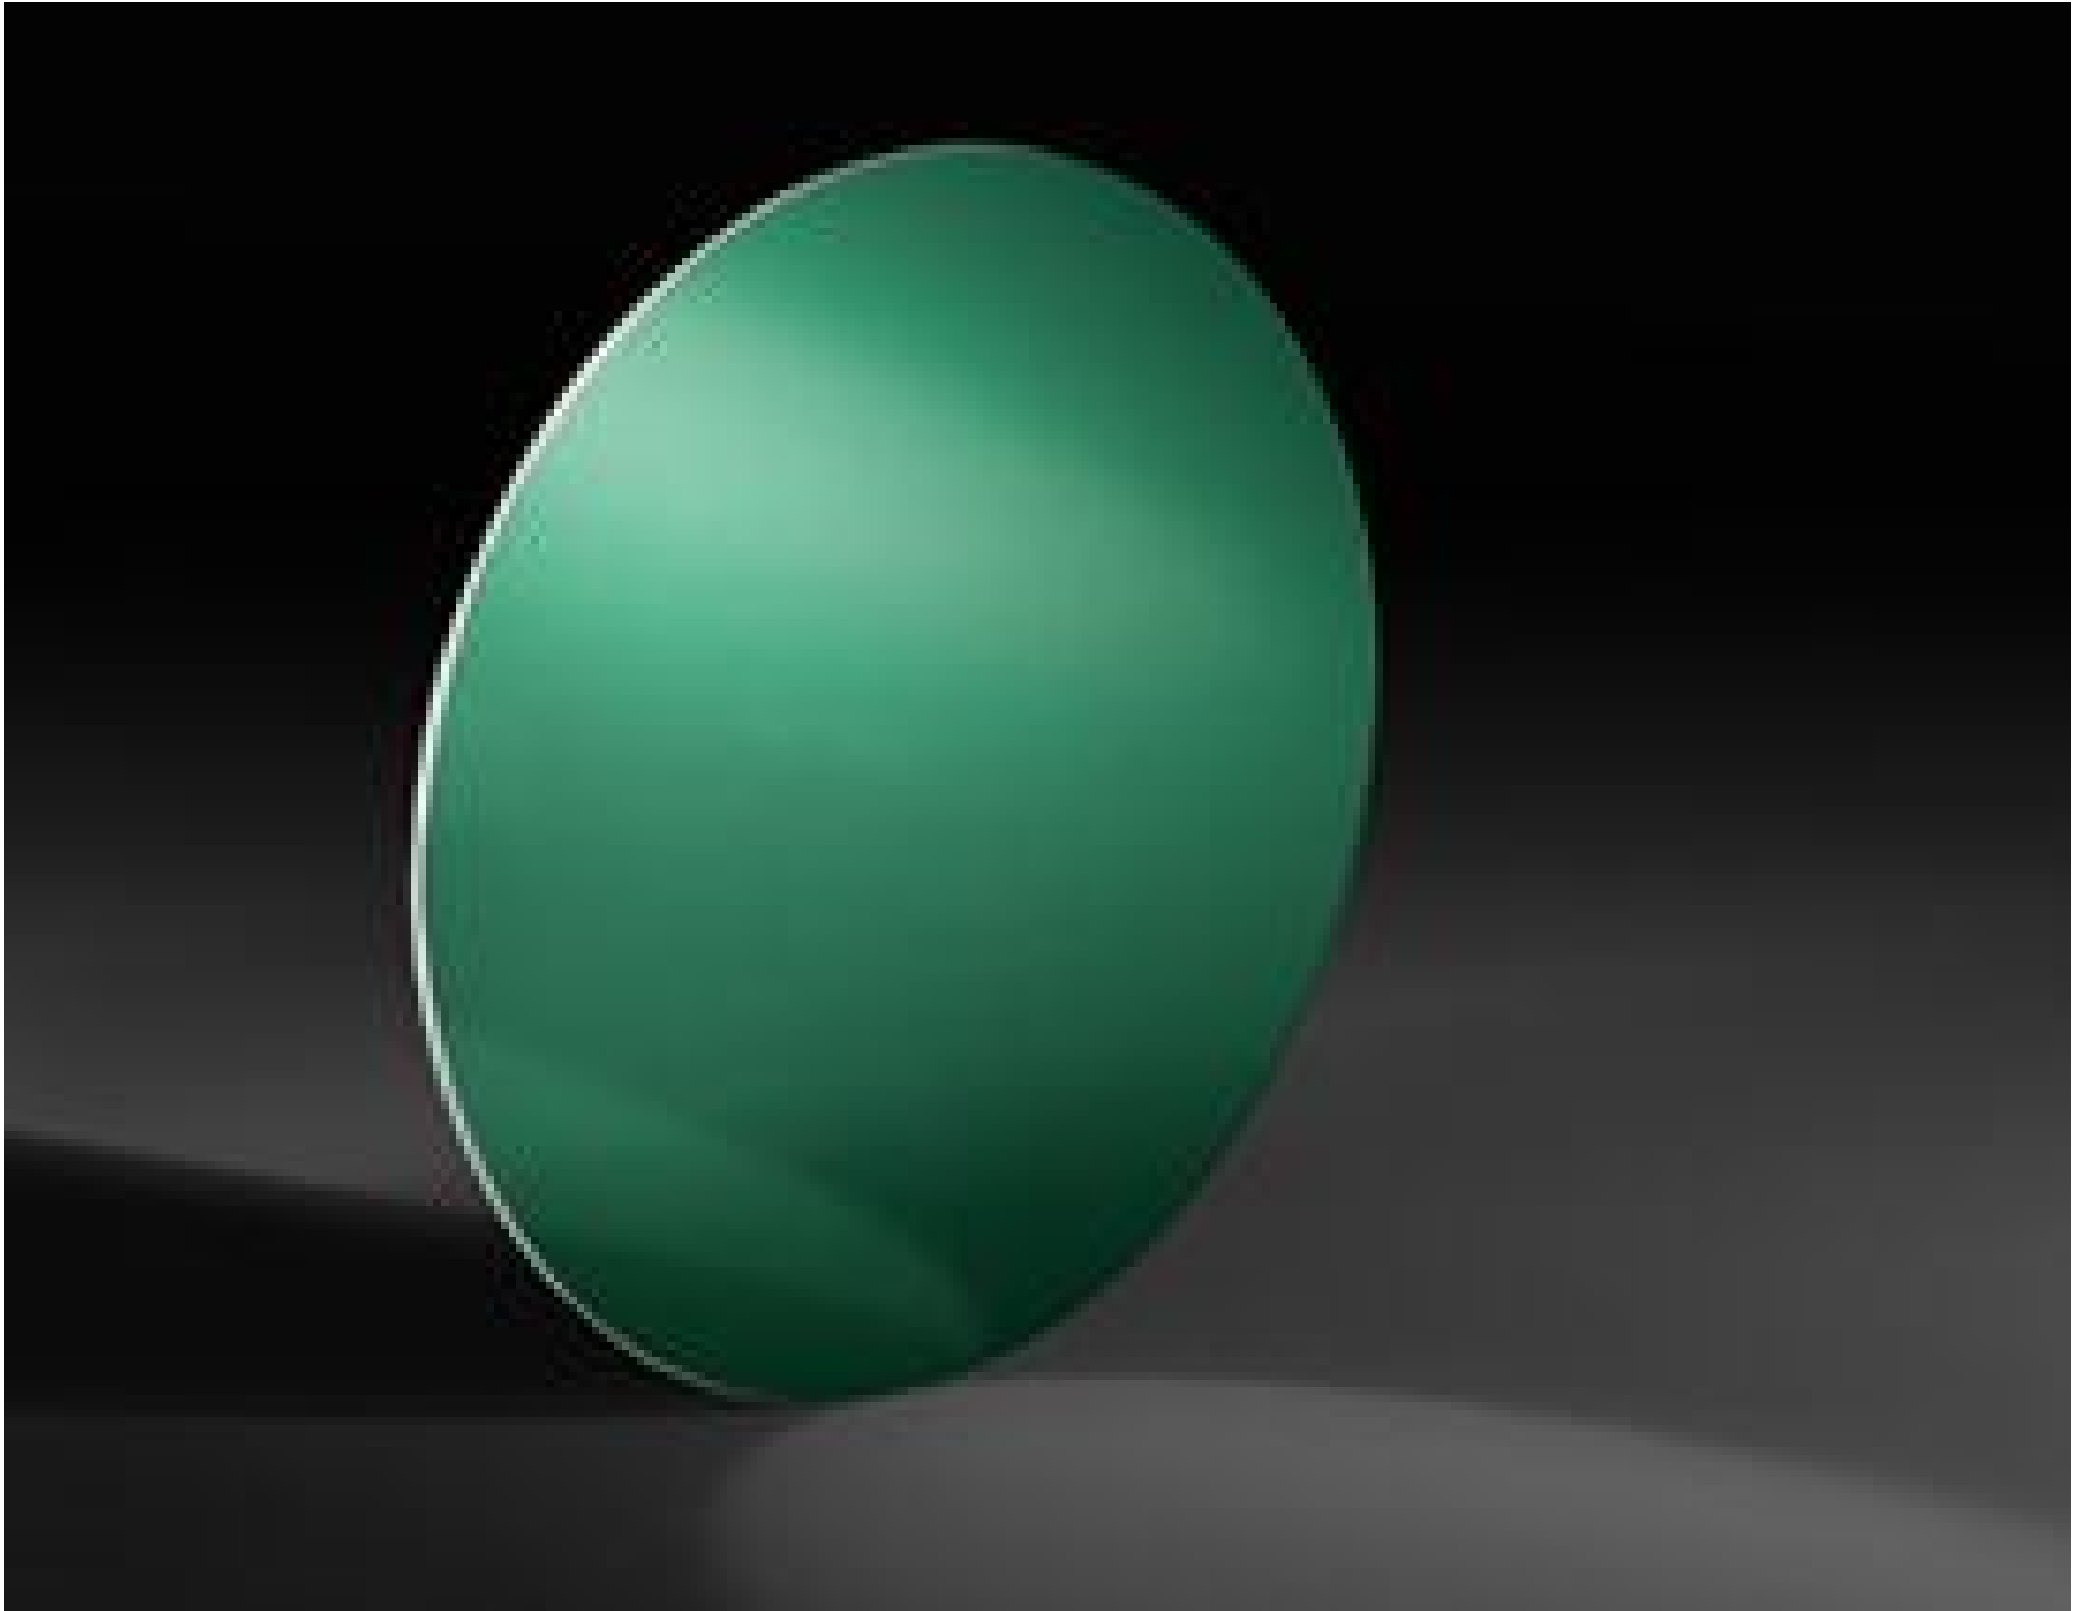

Stock #12-649 **5 In Stock**

- 1 + €595<sup>.00</sup>

**ADD TO CART**

Volume Pricing	
Qty 1-10	€595,00 each
Qty 11+	€515,00 each
Need More?	<a href="#">Request Quote</a>

**i** Prices shown are exclusive of VAT/local taxes

### Product Downloads

### General

Linear Polarizer **Type:**

**Note:**  
When the Reference Mark is orientated to the 3 or 9 o'clock position, the transmission axis runs left to right.

### Physical & Mechanical Properties

**Clear Aperture CA (mm):**

23

25.00 **Diameter (mm):**

0.70 ±0.07 **Thickness (mm):**

±0.2 **Dimensional Tolerance (mm):**

Wire Grid **Construction:**

±1.0 **Alignment Tolerance (°):**

### Optical Properties

0 ±20 **Angle of Incidence (°):**

BBAR (400-700nm) **Coating:**

348:1 @ 450nm  
885:1 @ 550nm  
1229:1 @ 650nm **Extinction Ratio:**

[Corning Eagle XG](#) **Substrate:**

80-50 **Surface Quality:**

87 **Transmission (%):**

±2.5 @ 420 - 700nm **Transmission Tolerance (%):**

R<sub>avg</sub> <1% @ 400 - 700nm (Back of Substrate) **Coating Specification:**

420 - 700 **Wavelength Range (nm):**

### Material Properties

31.7 x 10<sup>-7</sup>/°C **Thermal Expansion:**

### Environmental & Durability Factors

-40 to +200 **Operating Temperature (°C):**

### Regulatory Compliance

[Compliant](#) **RoHS 2015:**

[Compliant](#) **Reach 224:**

[View](#) **Certificate of Conformance:**

## Product Details

- Reflect S-Polarized Light, Transmit P-Polarized Light
- Protective Overcoat for Easy Handling and Cleaning
- Lighter, Thinner Design than Traditional [Wire Grid Polarizers](#)
- Overcoat Temperature Stability up to 200°C

Protective Overcoat Wire Grid Polarizers are used to reflect s-polarized light while transmitting p-polarized light in the visible spectrum. These polarizers consist of a thin aluminum wire grid attached to a glass substrate that is treated with a hard, protective coating. The overcoat protects the wire grid structure from scratches or other damage due to mechanical stress while enabling lighter, thinner designs compared to traditional [Wire Grid Polarizers](#) that use cover glass. The protective coating on these polarizers allows for them to be easily handled and cleaned, unlike [bare wire grid polarizers](#) where handling and cleaning is not recommended. Protective Overcoat Wire Grid Polarizers can be used in environments with high temperatures up to 200°C for over 1000 hours with minimal impact on performance.

**Note:** Reference marks indicate the axis of polarization.