


TECHSPEC[®] 50mm Dia UV Enhanced Aluminum, λ/20 Mirror

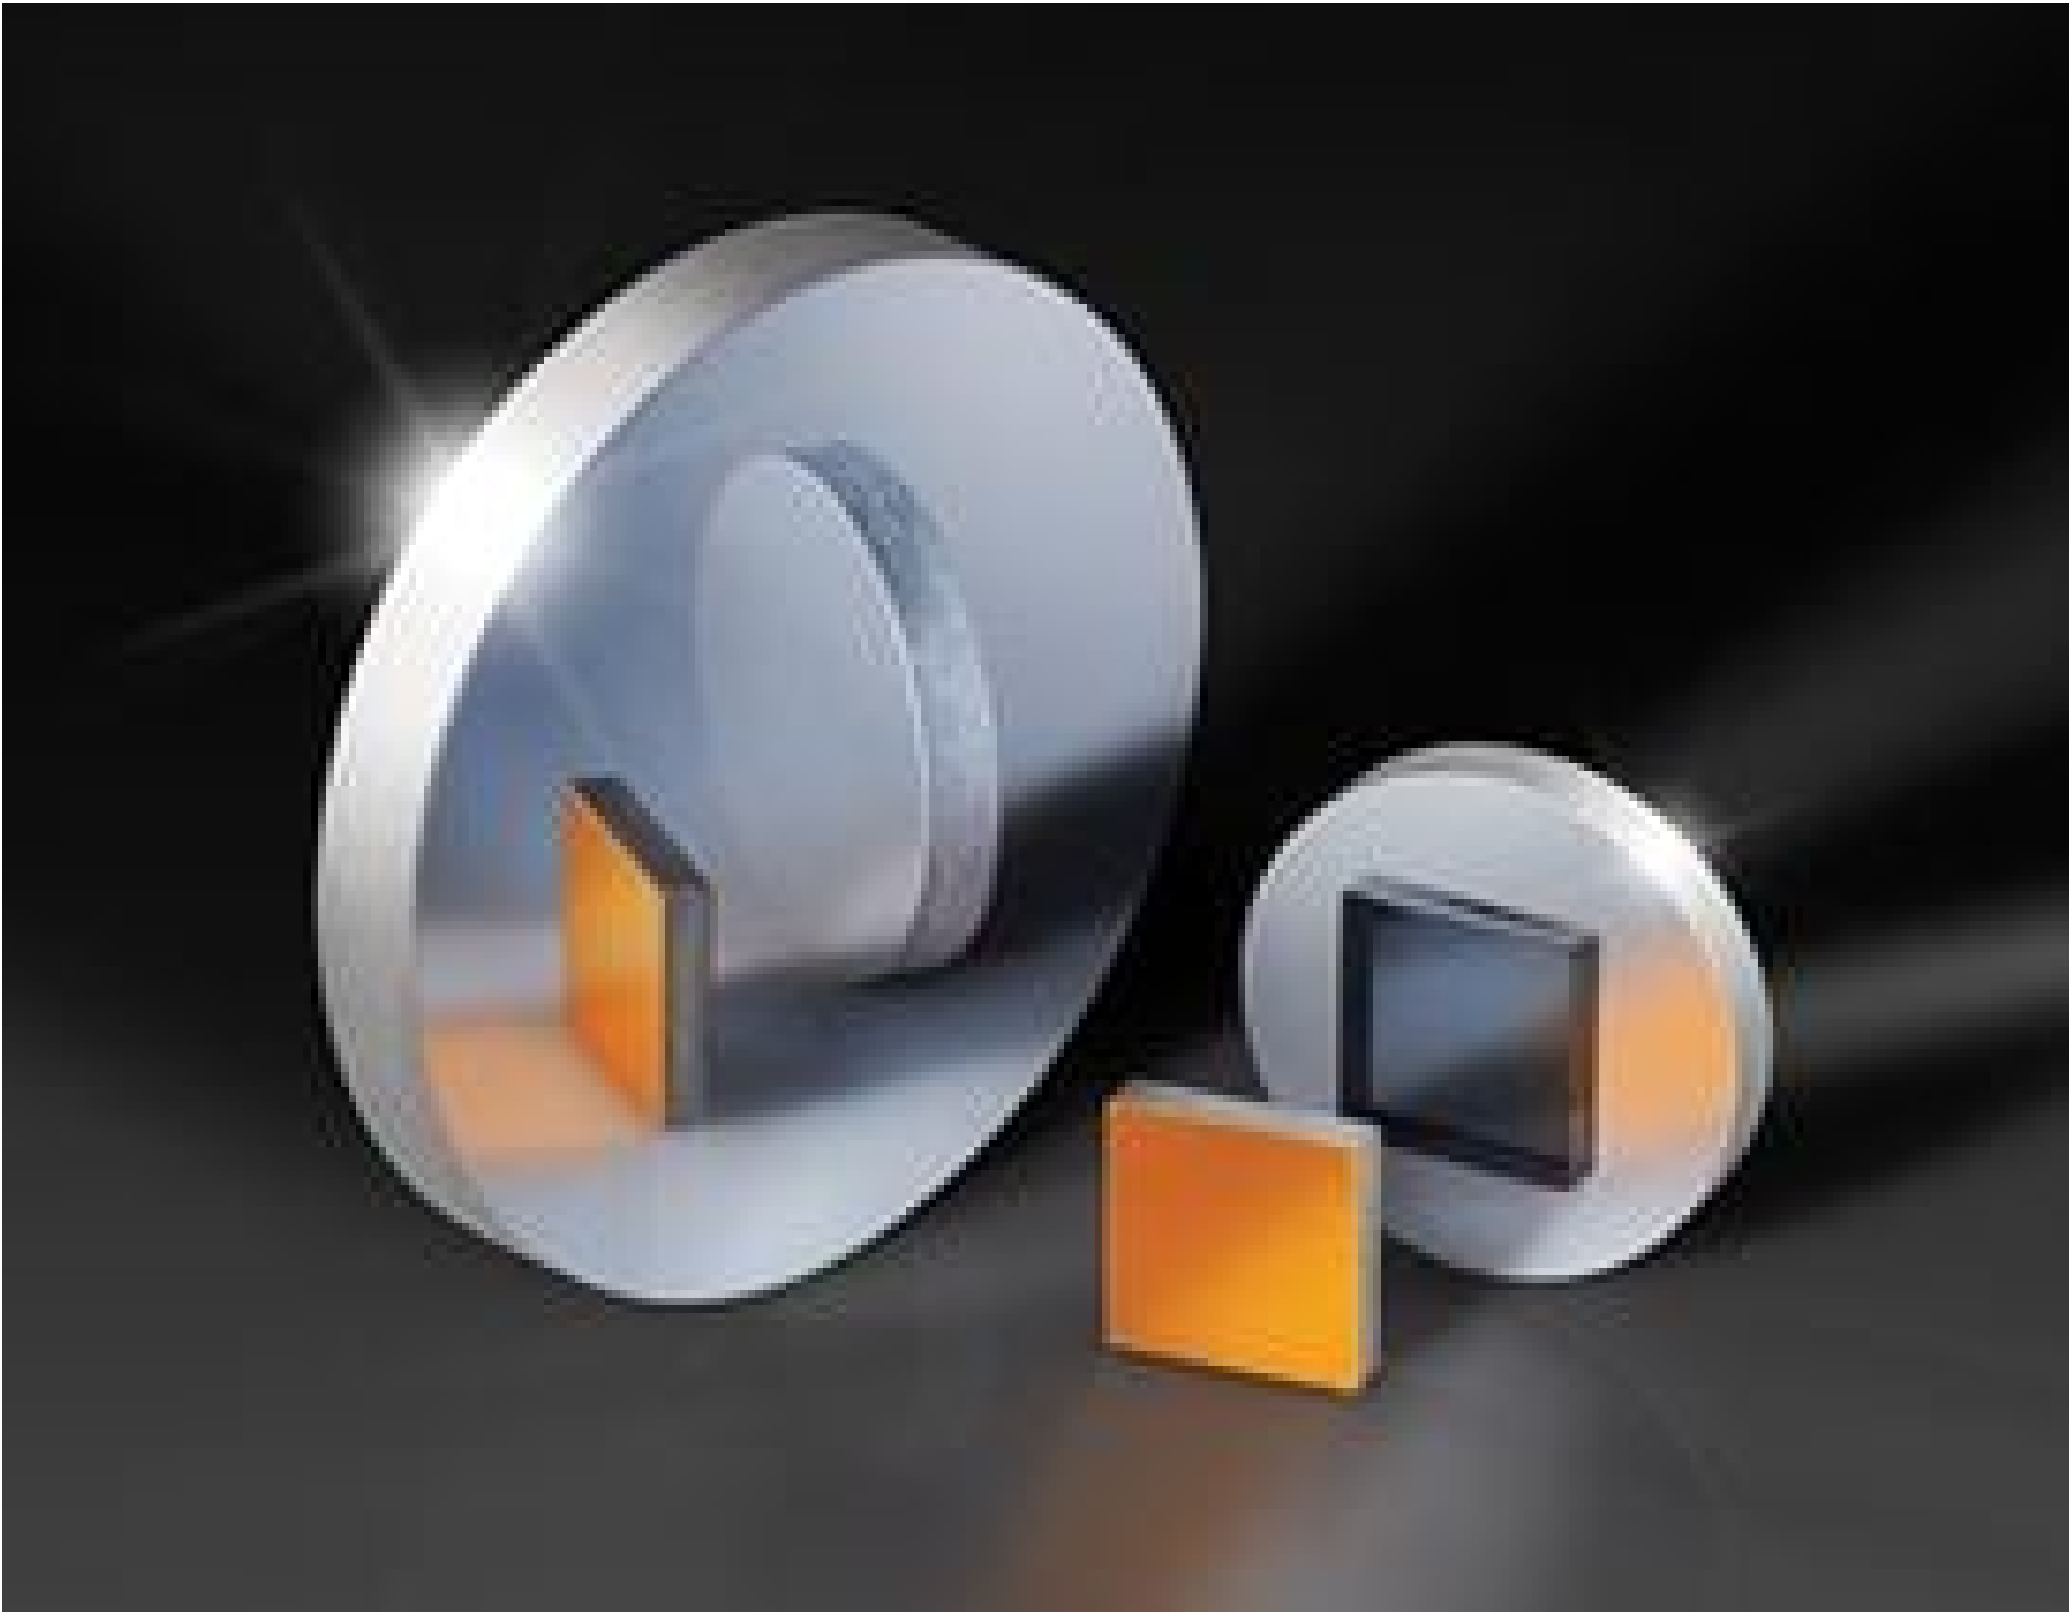

Stock **#70-297** 4 In Stock

-

1

+

€258^{.53}

ADD TO CART

Volume Pricing	
Qty 1-5	€258,53 each
Qty 6-25	€207,03 each
Qty 26-49	€193,64 each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

SPECIFICATIONS

General


Type:
Flat Mirror

Physical & Mechanical Properties	
50.00 +0.0/-0.20	Diameter (mm):
Commercial Polish	Back Surface:
90.00	Clear Aperture (%):
Ground, protective bevel as needed	Edges:
30.00	Parallelism (arcsec):
5.00 ±0.20	Thickness (mm):
Optical Properties	
λ/20 (flatness pre-coating)	Surface Flatness (P-V):
Fused Silica (Corning 7980)	Substrate: ☐
20-10	Surface Quality:
R _{avg} >85% @ 250 - 700nm R _{avg} >89% @ 250 - 450nm	Coating Specification:
UV Enhanced Aluminum (250-700nm)	Coating:
Metal	Coating Type:
250 - 700	Wavelength Range (nm):
Regulatory Compliance	
Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 247:

PRODUCT DETAILS

- Precision Fused Silica Substrate
 - 20-10 Surface Quality
 - Low Coefficient of Thermal Expansion
- TECHSPEC® λ/20 First Surface Mirrors are polished to industry leading surface accuracy and quality specifications to minimize reflected wavefront error. These mirrors feature a precision fused silica substrate with a low coefficient of thermal expansion. Multiple coating options are available, allowing these mirrors to be integrated into applications spanning the visible through infrared spectra. TECHSPEC® λ/20 First Surface Mirrors are ideal for beam steering and reflection applications and are available in a variety of size, thickness, and coating options.
- Note:** Surface flatness is measured before coating.

TECHNICAL INFORMATION

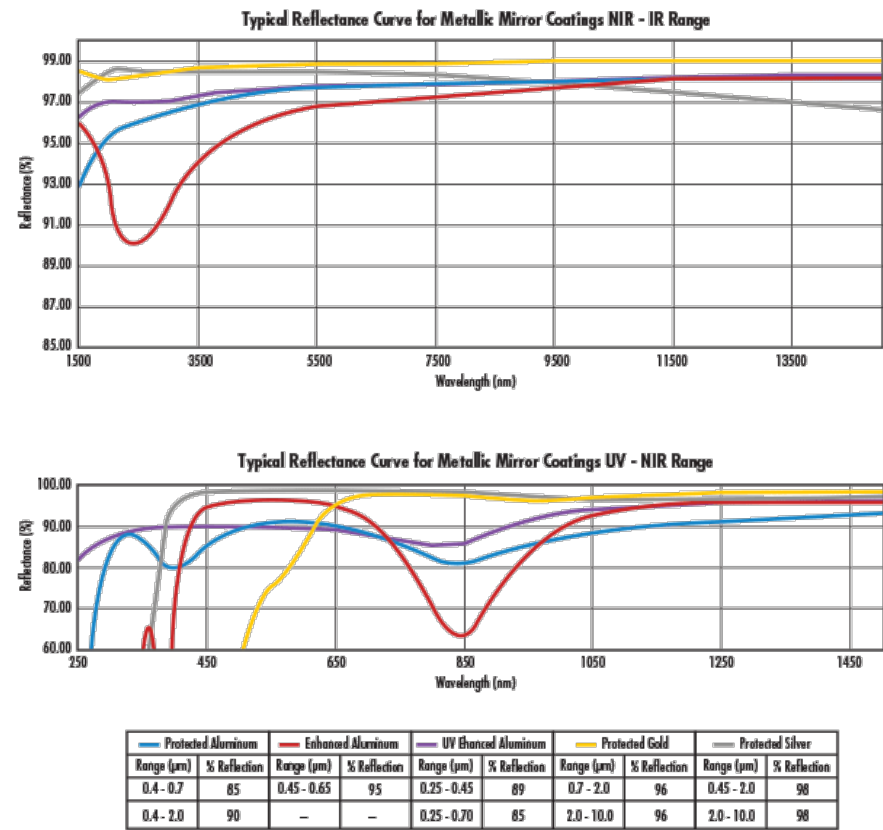

CUSTOM

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).